

AUTOMOTIVE

€

Promotion valid from 03/03/2025 to 29/08/2025 Prices do not include V.A.T.


2025 1/2


Beta 2.0



Configure your workshop in 3D online




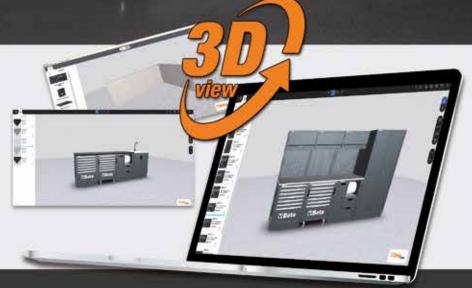

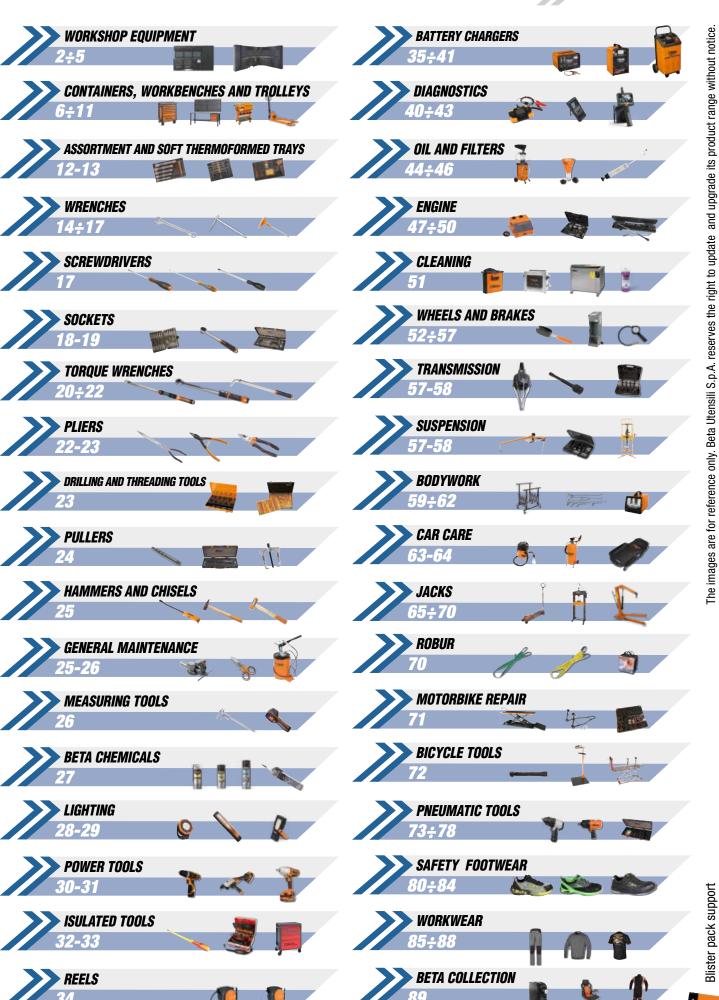



RSC50 2.0



The workshop equipment combination, RSC50, has been upgraded into the new, revolutionary RSC50 2.0, with a **NEW 70-CM-DEEP WORKTOP**,

for a large, convenient, functional work surface. It can be fitted with a vice, thereby allowing heavy-duty jobs to be carried out.



COMBINATION RSC50 2.0 D



Workshop equipment combination **RSC50 2.0 with 223 tools**


Combination comprising the following:

- 1 worktop, 1,495x**700 mm** (RSC50 2.0 NPG/2-1.5MT)
- 1 fixed module with 7 drawers (RSC50 2.0 M7)
- 1 fixed two-door module (RSC50 2.0 MA)
- 2 wall-mounted cabinets (RSC50 2.0 PM)
- 2 upper perforated tool panels (RSC50 2.0 PFS)
- 2 lower perforated tool panels (RSC50 2.0 PFI)
- 2 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 1 single-door tool cabinet (RSC50 2.0 A1)

9.940,00 € 3.790,00 €



M301



Beta



TOOLS Beta

net value

Included in the price assortment of



M304 M302





1/4



GET A NEW LOOK!

PURCHASE THE RSC50 2.0 D
OR RSC50 2.0 F COMBINATION
... Beta WILL TAKE
CARE OF THE TOOLS!



COMBINATION RSC50 2.0 F



Workshop equipment combination RSC50 2.0 with 445 tools

Combination comprising the following:

- 1 worktop, 2,240x**700 mm** (RSC50 2.0 NPG/3-2.2MT)
- 1 fixed module with 7 drawers (RSC50 2.0 M7)
- 1 mobile roller cab with 7 drawers (RSC50 2.0 C7)
- 1 fixed service module with 2 drawers (RSC50 2.0 MS-2C)
- 3 wall-mounted cabinets (RSC50 2.0 PM)
- 3 upper perforated tool panels (RSC50 2.0 PFS)
- 3 lower perforated tool panels (RSC50 2.0 PFI)
- 3 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 1 two-door tool cabinet (RSC50 2.0 A2)



i 411 kg



Included in the price assortment of

TOOLS Beta

net value



M105

15






116 14" 38"



M66





M266



C45PRO 2.0

C45PRO 2.0 D

Workshop equipment combination C45PRO 2.0 comprising:

- 1 fixed module with 7 drawers (C45PRO 2.0 M7)
- 1 mobile roller cab with 7 drawers (C45PRO 2.0 C7)
- 1 fixed service module (C45PRO 2.0 MS)
- 1 fixed module with 5 drawers (C45PRO 2.0 M5)
- 1 fixed two-door module (C45PRO 2.0 MA)
- 5 perforated tool panels (C45PRO 2.0 PF)
- 5 wall-mounted cupboards (C45PRO 2.0 PM)
- 7 wall brackets, wide type (C45PRO 2.0 SL)
- 2 wall brackets, narrow type (C45PRO 2.0 SS) • 2 single-door cabinets (C45PRO 2.0 AS1)







C45PRO 2.0 DX



11,570,00€ **5.929.00 €**



- 1 stainless steel coated MDF worktop, dimensions 2,040x**615** mm (C45PRO 2.0 PXE/3-2.0MT)
- 1 stainless steel coated MDF worktop, dimensions 1,360x**615** mm (C45PRO 2.0 PXE/2-1.3MT)
- 1 self-supporting complete corner with stainless steel coated MDF worktop (C45PRO 2.0 CORNER/X)







- 1 multi-ply wood worktop, dimensions 2,040x615 mm (C45PRO 2.0 PWE/3-2.0MT)
- 1 multi-ply wood worktop, dimensions 1,360x**615** mm (C45PRO 2.0 PWE/2-1.3MT)
- 1 self-supporting complete corner with multi-ply wood worktop (C45PRO 2.0 CORNER/W)



₫ 606 kg

C45PRO 2.0 A

Workshop equipment combination C45PRO 2.0

- Fixed service module (C45PRO 2.0 MS)
- Fixed module with 7 drawers (C45PRO 2.0 M7)
- Fixed two-door module (C45PRO 2.0 MA)
- 3 wall-mounted cabinets (C45PRO 2.0 PM)
- 3 perforated tool panels (C45PRO 2.0 PF)
- 2 wall brackets, narrow type (C45PRO 2.0 SS)
- 2 wall brackets, wide type (C45PRO 2.0 SL)



• Stainless steel coated MDF worktop, dimensions 2,040x615 mm (C45PRO 2.0 PXE/3-2.0MT)



• Multi-ply wood worktop, dimensions 2,040x615 mm (C45PRO 2.0 PWE/3-2.0MT)



2040 mm











NEW

The workshop equipment system, C45PRO 2.0, has been upgraded into the C45PRO 2.0 system, an even more convenient one, **BASED ON THE NEW 61.5-CM DEEP WORKTOP** to answer the most demanding professionals' requirements.



CONVENIENT AND PROFESSIONAL

C45PRO 2.0

Workshop equipment combination C45PRO 2.0

- Fixed module with 7 drawers (C45PRO 2.0 M7)
- Mobile roller cab with 7 drawers (C45PRO 2.0 C7)
- Fixed service module (C45PRO 2.0 MS)
- 3 perforated tool panels (C45PRO 2.0 PF)
- 3 wall-mounted cabinets (C45PRO 2.0 PM)
- 3 wall brackets, wide type (C45PRO 2.0 SL)
- 1 wall bracket, narrow type (C45PRO 2.0 SS)
- Two-door cabinet (C45PRO 2.0 AS2)







 Stainless steel coated MDF worktop, dimensions 2,040x615 mm (C45PRO 2.0 PXE/3-2.0MT)



C45PRO 2.0 W 3.069,00 €

• Multi-ply wood worktop, dimensions 2.040x**615** mm (C45PRO 2.0 PWE/3-2,0MT)



C45PRO 2.0 B

Workshop equipment combination C45PRO 2.0

- Fixed module with 5 drawers (C45PRO 2.0 M5)
- Fixed two-door module (C45PRO 2.0 MA)
- 2 wall-mounted cabinets (C45PRO 2.0 PM)
- 2 perforated tool panels (C45PRO 2.0 PF)
- 2 wall brackets, wide type (C45PRO 2.0 SL)
- 1 wall bracket, narrow type (C45PRO 2.0 SS)
- Single-door cabinet (C45PRO 2.0 AS1)





 Stainless steel coated MDF worktop, dimensions 1,360x615 mm (C45PRO 2.0 PXE/2-1.3MT)



₫ 206 kg



 Multi-ply wood worktop, dimensions 1,360x615 mm (C45PRO 2.0 PWE/2-1.3MT)







THE MOST COMPLETE Beta ASSORTMENT EVER

AND THE ROLLER CAB RSC24 IS INCLUDED IN THE PRICE!

THE MOST COMPLETE BETA ASSORTMENT EVER

2400 RSC24/8-VAL

024004007

Assortment of **445** tools for AUTOMOTIVE 14 38 12










M105








6.520,00€

2.199,00 €

Save up to 4.321,00 €





Extra large version

THE ROLLER CAB RSC24 IS INCLUDED IN THE PRICE!

Mobile roller cab with RSC24/8-F0

8 removable drawers (588x367 mm), with ball bearing slides

- 6 drawers, 70 mm high
- 2 drawers, 140 mm high

Promotion valid only with RSC24 FULL ORANGE



2400 RSC24/7-VAS

3 024004048

Assortment of **223** tools for *AUTOMOTIVE* 14 12





3.390,00€ **•29,00 € Medium version**





Save up to 1.961,00 €

M304

THE ROLLER CAB RSC24 IS INCLUDED IN THE PRICE!

Promotion valid only with RSC24 FULL ORANGE

Mobile roller cab with RSC24/7-F0

7 removable drawers (588x367 mm), with ball bearing slides:

- 5 drawers, 70 mm high 1 drawer, 140 mm high
- 1 drawer, 210 mm high

Beta

RSC24

Mobile Roller cab

- ABS reinforced worktop
- · Multi-purpose top with anti-fall edges and eight holes for accommodating screwdrivers
- Drawer bases protected by foamed rubber mats
- 4 castors Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays
- Front centralized safety lock
- Static load capacity: 800 kg
- Built-in bottle holder (can be applied on both sides).

The following accessories can be added:

- Wood worktop 2400 RSC24/PL
- Perforated tool panel 2400 RSC24/PF
- Folding shelf 2400 RSC24/MP
- Document holder 2400 RSC24/PD
- Paper roll holder 2400 RSC24/PC
- Computer wall bracket 2400 RSC24/SPC







RSC24AXL

Mobile roller cab, WITH ANTI-TILT SYSTEM, long model

- · New ABS reinforced worktop with anti-fall edges, eight holes for accommodating screwdrivers and 6 tote trays
- Sturdy nylon front, with built-in label holder.
- Drawer bases protected by foamed rubber mats
- 4 castors, Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- · Built-in side bottle holder (can be applied on both sides)
- Each drawer can accommodate up to 6 EVA foam or ABS thermoformed trays

Following accessories can be added: • Wood worktop 2400 RSC24/PL

- Document holder 2400 RSC24/PD-A
- Paper roll holder 2400 RSC24/PC-A





	Ral 7016	Ral 7016	Nai 1010
RSC24AXL/7	024004271	024004273	024004277
RSC24AXL/8	024004281	024004283	024004287
RSC24AXL/9	024004291	024004293	024004297

۱°		♣ max	i∎ kg	€
5	70 mm	30 kg		- 007 00 6
	140 mm	35 kg	84	1.700,00€ 967,00€
l	210 mm	35 kg		
6	70 mm	30 kg	88	1.820,00€ 1.033,00€
2	140 mm	35 kg	00	1.000,00 €
3	70 mm	30 kg	90	1 000 00 f
1	140 mm	35 kg	30	1.935,00€ 1.099,00€



1.847.00 €


RSC28

SuperTank trolley with wood worktop and 10 drawers

- 10 drawers (588x367 mm) with ball bearing slides
- · Quick, safe system for opening and closing drawers, with nylon and fibreglass front
- 5 side drawers:
 - 4 drawers, 70 mm high
 - 1 drawer, 210 mm high
- 5 front drawers:
 - 4 drawers, 70 mm high
 - 1 drawer, 210 mm high
- Drawer bases protected by foamed rubber mats.
- 4 high-capacity castors, Ø 150 mm: 2 fixed and 2 steering with brakes
- · 2 centralized safety locks
- 3 front tool drawers
- Multi-ply wood worktop with holes for a vice (1599F/150 - 1599GI/150, to be ordered separately)
- · Built-in tool compartment



•		•
Ral 2011	Ral 7016	Ral 3000
028003001	028003007	028003003



n°		i∎Max
8	70 mm	25 kg
2	210 mm	30 kg



- · Side compartment with foldaway door with lock
- · Built-in bottle holders
- 135-mm-high storage compartment with plastic-covered base



RSC24AXXL

2.420,00€ **.379,00 €**

Mobile roller cab with 8 drawers and anti-tilt system, long model

- 1 fully removable drawer (1,176x367 mm), with ball bearing slides
- 7 fully removable drawers (882x367 mm), with ball bearing slides: 6 drawers 70 mm high

1 drawer 140 mm high


- Worktop made from stainless steel coated MDF, with holes for vice item 1599F/125 or 1599GI/125 (to be ordered separately) and 6 tote trays
- Sturdy nylon fronts, with built-in label holders
- Drawer bases protected by foamed rubber mats
- Removable side compartment,
- with ball bearing slides, with shelf and lock
 4 castors, Ø 150 mm: 2 fixed and 2 steering with brakes

Ral 7016

• 3 safety locks

Ral 7016

- Built-in paper roll holder
- Built-in bottle holder
- Static load capacity: 1,100 kg
- Following trays can be added: up to 8 EVA foam or ABS thermoformed trays in drawer 1,176x367 mm up to 6 EVA foam or ABS thermoformed trays in drawer 882x367 mm



₫ 131 kg





C45PRO 2.0 MWS

Ral 7016 024004781 024004783 024004787

Work Station roller cab with 7 drawers and built-in waste bin

- 1 drawer (1248x406 mm) with ball bearing slides
- 6 drawers (782x406 mm) with ball bearing slides:
 - 5 drawers 65 mm high
 - 1 drawer 145 mm high
- Drawer bases protected by foamed rubber mats
- Can be fitted with thermoformed trays
- Storage compartment with intermediate shelf and door, interior dimensions 504x424x597 mm
- · Built-in waste bin
- Built-in paper roll compartment
- 4 heavy-duty castors, Ø 150 mm, 2 fixed and 2 steering with brakes
- Front centralised lock
- Can accommodate a vice (1599P/150, to be ordered separately)





n°		åMax
5	65 mm	25 kg
1	105 mm	40 kg
1	145 mm	30 ka

C45PRO 2.0 MWS/X

1,955,00€ 1.049.00€

· Worktop (1680 mm) made of stainless steel coated MDF





1,905,00€ .049,00€

• Multi-ply wood worktop (1680 mm)





NEW RANGE OF WORKBENCHES

MODULAR

Beta has launched the new range of workbenches, MODULAR, designed to make it possible for professionals to configure their workplaces from scratch, adapting them to their individual needs

- · Worktop (2,100x750 mm) made from multi-ply wood, 38 mm thick
- Front centralized lock
- Steel frame with 4 supporting legs
- Holes for a vice (1599F/150 1599Gl/150, to be ordered separately)
- 2 lower half-shelves for objects, 1,788x335 mm; thickness: 40 mm
- Static load capacity: 800 kg, evenly distributed
- Can be fixed to floor

Kit with 4 perforated tool panels, comprising the following:

• 3 supporting brackets

146 kg

- 6 400-mm uprights
- 2 1,015-mm supports; can accommodate 1 19" rack multi-socket (not included)
- 4 perforated tool panels, 1,015x25x400 mm





C58BC-W2,1 4C+SVR



Workbench, 2.1 m long, with wood worktop, with 4 drawers

- 4 drawers (367x588 mm) with ball bearing slides: 2 drawers 70 mm high 2 drawers 140 mm high.
- Drawer bases protected by foamed rubber mats
- · Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays







C58BC-W2,1 4CA+SVR

2.275,00€

🕯 161 kg

Workbench, 2.1 m long, with wood worktop, 4 drawers and door module

- 1 module with door and lock
- 4 drawers (367x588 mm) with ball bearing slides: 2 drawers 70 mm high 2 drawers 140 mm high.
- · Drawer bases protected by foamed rubber mats
- · Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays












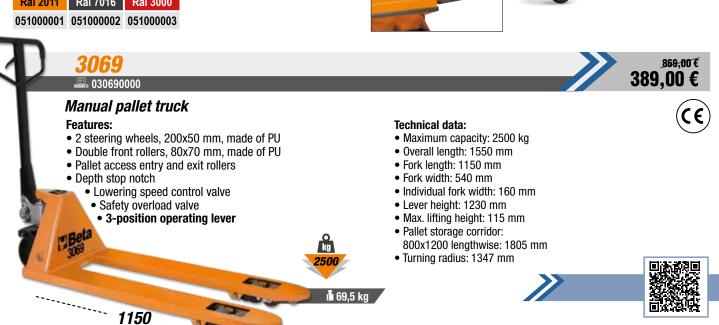

mm



ASSORTMENT AND SOFT THERMOFORMED TRAYS



Recommended with: RSC23T - RSC24A - RSC24AXL -RSC24AXL/P7 - RSC24AXXL - RSC24L/7- RSC24L-CAB - C37 - C39 -C39SM - C39MD - RSC28 - C59 - C58BC - RSC55 - RSC50 2.0

Assortment of 102 tools in foam trays












empty thermoformed tray









35 T234

1370 T234 1390

1/2

245,00€ 138,00€






360,00€ 204,00€













146,00€ 83,00 €



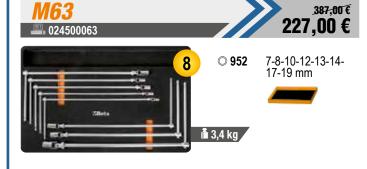




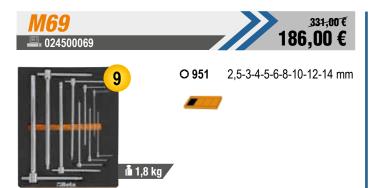







895/1 - 895/3 - 895/6 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm O 900 5-6-7-8-9-10-11-12-13 mm O 900L

O 900ME 3-4-5-6-7 mm 0,8x4-1x5,5-1,2x6,5-1,2x8 mm ● 900LP

○ 900PH PH1-PH2-PH3-PH4

O 900TX T10-T15-T20-T25-T27-T30-T40 900/20 50 mm - 900/20L 100 mm

900/21 150 mm 900/25 900BG/30 900/42

@ 900/55 O 920A

8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-

28-30-32 mm


920/15 - 920/25 920AN/125 125 mm 920AN/250 250 mm

920/42 @ 920/55

© 920FTX 10-12-14-16-18-20-22-24 mm 10-12-13-14-15-16-17-18-O 920AL

19-21-22 mm

1,470,00€ 714,00 €



O 900 4-4,5-5-5,5-6-7-8-9-10 11-12-13-14 mm 910/16 **900L** 5-6-7-8-9-10-11-12-13 mm **O 96BPC/SC9** 1,5-2-2,5-3-4-5-6-8-10 mm 910/21 125 mm 910/22 250 mm 895/1 - 895/3 - 895/6 910/25 - 910/42 3-4-5-6-7 mm 0,8x4-1x5,5-1,2x6,5-,2x8 mm O 900ME @ 910/55 **⊕** 900LP 8-10-11-12-13-14-15-16-17 O 920A **○** 900PH PH1-PH2-PH3-PH4 18-19-20-21-22-23-24-26 27-28-30-32 mm O 900TX T10-T15-T20-T25-T27-T30-T40 900/16 □ 1/4 - ■ 3/8 920/15 □ 1/2 - ■ 3/8 900/... 50-100-150 mm 920/25 900/25 - 900BG/30 - 900/42 920AN 125 - 250 mm 920/42


@ 900/55

O 910A 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22 mm

□ 3/8 - ■ 1/4 □ 3/8 - ■ 1/2 910/15

920/55

O 956E 16-17,8-20,8 mm

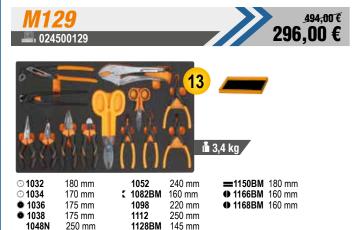



4x30 mm PH0x60-PH1x80-PH2x100-PH3x150 mm 1201EN 0 1202E

PH1X30 mm 1202EN

© 17-19-21 mm

720LC

1207E/TX T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45


1253 3,5x100 mm

32 Ø 4 mm

34 150 mm

36 125 mm

35 200-250 mm



1390 Ø 35 mm **1692** 3 m ● 1719BMA/R 200 mm 1737NX 1712 ■ 1719BMA/Q 200 mm 1771 170 mm ▲ 1719BMA/T 200 mm



BETA'S ICONIC WRENCH

A stylish, slim shape enhanced by a slender profile, lighter to the touch.

The strength, resilience and ergonomic design of the Beta wrench reach even higher

values, to provide users with the best possible tool.

The manufacturing process is carried out in our factories in Sovico and Sulmona, on the basis of state-of-the-art automation technology and the best trained workers.

ERGONOMIC

The offset ring has a 15 degree angle to protect the hand. The shape is obtained from a die; it is not bent later.



POWERFUL

Torque values more than doubled compared to the requirements to be satisfied under ISO 1711.

STRENGTH

Remarkable strength: in case of improper use, the wrench buckles, without breaking suddenly and dangerously.



120.00€

Set of 15 combination wrenches

with holder

6-7-8-9-10-11-12-13-14-15-16-17-19-22-24 mm



Set of 25 combination wrenches with holder

€ 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-2122-23-24-25-26-27-28-30-32 mm



Set of 12 double open end wrenches in roll-up wallet made of durable polyester

❸ 6x7-8x9-10x11-12x13 14x15-16x17-18x19 20x22-21x23-24x26 25x28-30x32 mm





4 000830085

150,50€ 86.00€

Set of 5 half-moon ring wrenches

10x12-11x13-15x17 16x18-19x22 mm



4 000900156

Set of 8 double ended deep offset ring wrenches in roll-up wallet made of durable polyester

❸ 6x7-8x9-10x11-12x13 14x15-16x17-18x19-20x22 mm



141,50€

83.00€







141/B9 ■ 001410069 215,00€ 109,00€

Set of 9 ratcheting combination wrenches, straight series in wallet

8-10-11-12-13-14-15-17-19 mm



Set of 6 flare nut open ring wrenches

❸ 8x10-10x11-11x13-12x14-17x19-19x22 mm





95FTX/S4 ■ 000950325

63,50€
32,00€

Set of 4 double-ended straight wrenches, for Torx® head screws

© E6xE8-E10xE12 E14xE18-E20xE24











Set of 9 ball head offset hexagon key wrenches, with screw holding system





Set of 9 ball head offset

50,00€ **25,00**€

25,00 €

97B1X/SC8

Set of 8 ball head offset key

wrenches, long model,

89,50€ 48,00€

50,00 € Set of 8 ball head offset key wrenches, long

97BRTXL/SC8

Set of 8 ball head offset key wrenches, long model, for Tamper Resistant Torx® head screws

104,50€

()










WRENCHES - SCREWDRIVERS



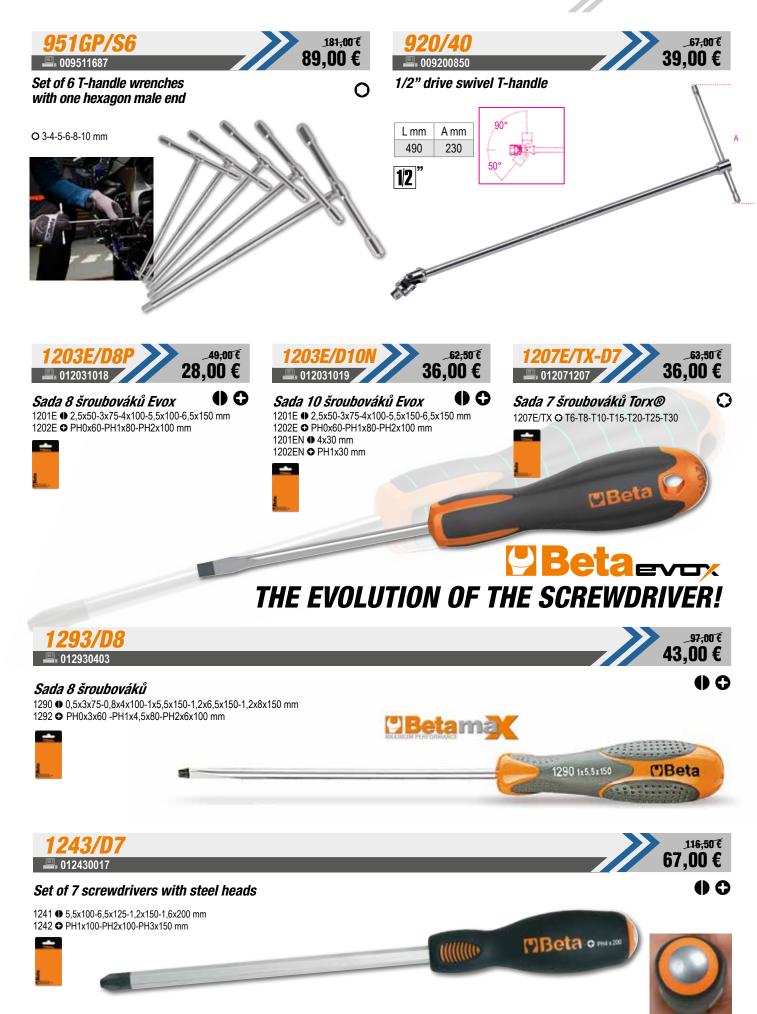



900/C11

-- 009000971

254,00 € 146,00 €

14"

11 hexagon sockets, 20 bits and 8 accessories,

in metal case



	861LP	•	0,5x3-0,8x5,5-1x5,5-1,2x6,5 mm
	861PE	0	3-4-5-6-8 mm
	861PH	0	PH0-PH1-PH2-PH3
	861TX	0	T8-T10-T15-T20-T25-T30-T40
-	895/1		○1/4" - □1/4"
	900	0	5-5,5-6-7-8-9-10-11-12-13-14 mm
~	900/16		□1/4 - ■3/8"
	900/20		50 mm
-	900/21		150 mm
	900/25		
	900/42		
	900BG/30		
•	900/55	(1)	

408,00 € 232,00 €

Assortment of 22 hexagon sockets and 6 accessories, in metal case

	E 1	900	0	5-5,5-6-7-8-9-10-11-12-13 mm
4/# "		900/20		50 mm
1/4	***	900/25		
		900/55	•	
		920A	0	10-13-14-15-17-18-19-22-24 27-30-32 mm
1/9 "		920/21		125 mm
	1	920/25		
	•	920/55	0	



364;00 € **208,00** € 920A/C17M **3** 009200924

Assortment of 17 hexagon sockets and 5 accessories in foam tray, in metal case



009280955 Assortment of 12 hexagon hand sockets

and 5 accessories, in metal case



962,00€



-	920A	0	10-11-12-13-14-15-16-17-18-19-20-21-22-24 -27-30-32 mm
	920/21		125 mm
	920/22		255 mm
(Sec.)	920/25		
	920/42		305 mm
	920/55	0	



─ 530x220x80 mm

	928A	0	22-24-27-30-32-34-36-38-41-46-50-55 mm
	928/21		200 mm
=======================================	928/22		380 mm
500	928/25		
	928/42		450 mm
	928/55		®



BETA'S RANGE OF RATCHETS

NEW **NEW DESIGN**



INNOVATIVE MATERIALS Ratchet with up to 72 teeth: take-up angle of 5° for jobs in small areas

FOR TOP **PERFORMANCE**

Ergonomic bi-material handle



Hanging hole on handle

- · Designed and manufactured in the company's Italian-based factories, has been restyled.
- Hand pressing on head does not cause any reversal and allows for free lever return
- One-handed reversal

The versions with 1/2" and 3/4" square drives allow for reduced weight, thus resulting in a product synonymous with optimal handiness, superior ease of use as well as uncompromising sturdiness and performance.

1	L mm	Ø mm	Amm		teeth		€
900/55	127	25	29	1/4"	4	009001155	.53,00 € 30,00 €
910/55	207	31	33	3/8"	@	009101155	.57,00 € 32,00 €
920/55	271	40	41	1/2"	1	009201155	.69,50 € 39,00 €
928/55	504	58	59	3/4"	@	009281155	182,50 € 105.00 €



52 hexagon bits, 10 mm and 2 accessories



₹ 250x170x70 mm

i 2,1 kg



-	867PE	0	4-5-6-7-8-10-12 mm
	867PE/L	0	4-5-6-7-8-10-12 mm
-	867XZN	0	M5-M6-M8-M10-M12
	867XZN/L	0	M5-M6-M8-M10-M12
-	867TX	0	T20-T25-T30-T40-T45-T50-T55
8	867TX/L	0	T20-T25-T30-T40-T45-T50-T55
	867RTX	0	T20-T25-T30-T40-T45-T50-T55
	867RTX/L	0	T20-T25-T30-T40-T45-T50-T55
	867/1		○ 10 mm - □ 3/8"
	867/2		○ 10 mm - □ 1/2"

009200532

197,50 € 109,00 €

Set of 9 socket drivers for Torx® head screws on support

T20-T25-T27-T30-T40-T45-T50-T55-T60







599DGT-AW

Electronic torque wrench, torque and angle readout, with reversible ratchet and wireless data transmission. right-hand (accuracy: ± 2%) and left-hand (accuracy: ± 3%) tightening

- Tightening types: torque, angle, torque + angle
- Dual measurement mode: peak hold and track
- · Light indicators, an intermittent sound and tactile feedback inform user that preset torque or angle has been reached
- Last 999 peak torque and/or angle readings can be stored and displayed
- 9 "Preset" modes can be saved and preset
- Key safety lockout
- Wrench can be associated with a certain user via software
- Tightening data traceability. Software allows date and time, tool serial number, set tightening value and reached value to be stored and associated with user ID
- Nonslip bi-material handle
- Wrench + software in 9 languages
- Included: 3 AA 1.5V batteries, wireless USB key and software USB key





599DGT-AW 675.00 €

Nm	Kgfm	lbf.ft		L (mm)	шш
6÷30	0,6÷3	4,5÷22	1/4"	410	0,1



27÷135 2,7÷13,5 20÷100 3/8"






Beta seepgr-AW

445

118,00€

1,0







 Bi-directional wireless data transmission, from wrench to software and vice versa, in mass a posteriori or in real time



TORQUE + ANGLE

· Customized data processing software with immediate, easy-to-read OK/NG result and real time display of charts

610/5

4 006100025

Click-type torque wrenches with reversible ratchets, for right-hand tightening, with 5 preset values, torque accuracy: ± 4%

- Selectable torque values: 90 100 110 - 120 - 130 Nm
- Pull handle end to unlock wrench and select required tightening torque
- When not in use, set torque to lowest value of torque wrench range





Click-type torque wrenches with L-shaped levers, for right-hand tightening, with 5 preset values, torque accuracy: ± 4%



90 - 100 - 110 - 120 - 130 Nm

189,00€ 610L/5 109,00 € **3** 006100150

L mm

470

L1 mm

80

Selectable torque values: 120 - 140 - 160 - 180 - 200 Nm

UNI EN ISO 6789




TORQUE WRENCH ZER®-RESET

THE TORQUE WRENCH THAT DOES NOT REQUIRE RELEASING TENSION

ZERO-RESET click-type torque wrenches with reversible ratchets, for right-hand tightening, torque accuracy: ± 3%

UNI EN ISO 6789












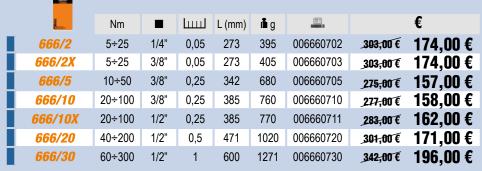









ZERO-RESET click-type torque wrenches with push-through ratchets, for right-/left-hand tightening, torque accuracy: ± 3%

UNI EN ISO 6789



3/4



Barner .	Nm		шш	L (mm)	å g			€
667/20	40÷200	1/2"	0,5	471	1035	006670720	296,00 €	168,00€
<i>667/30</i>	60÷300	1/2"	1,0	600	1285	006670730	330,00€	186,00€
<i>667/40</i>	80÷400	3/4"	1,0	710	2220	006670740	793,00€	450,00€



677/C800 **UNI EN ISO 6789**

Break-back torque wrenches with push-through ratchets, for right-hand and left-hand tightening, torque accuracy: ±4% in case

The break-back torque wrench, Beta 677, is particularly suitable for heavy-duty use at high torques. The break-back mechanism informs the user that the set torque has been reached through the bending of the wrench at the joint by approximately 20°.



 Wrench composed of two parts: lever with ratchet and break-back system with torque adjustment

	Nm	kgfm	lbf.ft		لسيا	L (mm)	å kg	ET .		€
677/C600	120÷600	12÷60	100÷450	3/4"	10	1059	6,0	006770607	1.210,00€	699,00€
677/C800	200÷800	20÷80	150÷600	3/4"	10	1319	6,7	006770612	1,260,00€	725,00€
677/C1000	300÷1000	30÷100	200÷750	3/4"	20	1554	7,4	006770616	1.335,00€	769,00€





Digital angle indicator

- · For tightening screws to values set by measuring torsion angle
- Complete with buzzer and LED indicators informing user that preset angle has almost or finally been reached
- For right-hand and left-hand tightening
- Angle accuracy: +/-2° Resolution: 0.1°
- Up to 9 angle values can be preset
- Up to 50 measurements can be stored

Supplied in an ABS case

Power supply: 2 AAA-size batteries (included)








601CA 253,00 € **3** 006010120

Digital torque and angle indicator

- · Allows torque and angle tightening
- For right-hand and left-hand tightening
 Torque accuracy: +/- 4% of set value Angle accuracy: +/- 2°
- Reading scale in Nm/ft.lb/in-lb/kg.cm/degrees
- Complete with buzzer and LED indicators informing use that preset angle or torque has almost or finally been reached
- Up to 9 torque or angle values can be preset








<u>--</u> 01009006<u>0</u>

88,00€ \$1,00 €



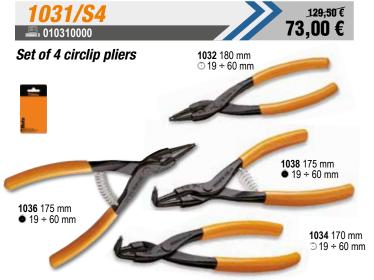



69,00€ 39,00€



1169BM/D3

4 011690133

113,50€ 65,00€

Set of 1 combination pliers, 1 long needle nose pliers and 1 diagonal cutting nippers









ABSOLUTELY GROUNDBREAKING REMARKABLE CUTTING CAPACITY



76,00€ 42.00€



Heavy duty universal pliers with cutting edges made of sintered steel

- The decentralized pin allows the fulcrum to be closer to the cutting point, thereby resulting in an improved lever effect.
- Perfect alignment of the nose and the thin profile allow the pliers to be used in very small areas.
- The body of the pliers is made of a reliable molybdenum steel which has been heat treated in order to be flexible and resistant so as to guarantee a safe grip in any moment.





Shearing stress - static test =

73%

Average life of cutting edges = (test ISO 5744)

.127%

Hardness of M2 steel cutting edges =

65HRC



17.00€

437U/09

Beta

228.00€ **004370550**

Assortment for repairing damaged threads

in metal case

M5X0,8 M6X1,0 M8X1,25 M10X1,5 M12X1,75



1430/S5 014300105

Set of 5 tapered extractors for broken screws and studs, made from hardened steel, in case 1430/1-1430/2-1430/3

1430/4-1430/5



446/C110

3 004460060

549.00 €

Assortment of 105 chrome-steel taps and dies, metric thread, and 5 accessories for car repair jobs, in wooden case





		(3)	83
430 M mm	433 M mm	440/440A M mm	441/441A M mm
2x0,4	6x0,75 - 7x0,75	2x0,4	6x0,75 - 7x0,75
3x0,5	8x0,75 -8x1	3x0,5	8x0,75 -8x1
4x0,7	9x0,75 - 9x1	4x0,7	9x0,75 - 9x1
5x0,8	10x0,75 -10x1	5x0,8	10x0,75 -10x1
6x1	10x1,25 - 11x0,75	6x1	10x1,25 - 11x0,75
7x1	11x1 - 11x1,25	7x1	11x1 - 11x1,25
8x1,25	12x0,75 - 12x1	8x1,25	12x0,75 - 12x1
9x1,25	12x1,25 - 12x1,5	9x1,25	12x1,25 - 12x1,5
10x1,5	14x1 - 14x1,25	10x1,5	14x1 - 14x1,25
11x1,5	14x1,5 - 16x1	11x1,5	14x1,5 - 16x1
12x1,75	16x1,5 - 18x1,5	12x1,75	16x1,5 - 18x1,5
14x2		14x2	
16x2		16x2	





Puller 1542/1 with 5 extractors 1544

	A mm	C mm
1544/1	9÷12	0,80
1544/2	13÷17	1,15
1544/3	16÷21	1,70
1544/4	20÷25	1,65
1544/5	25÷30	2,00





Dummy ball bearing extractors

Bearings: 1547/1 6011-6014, 6206-6211, 6303-6308, 6403-6405 1547/2 6004-6010, 6200-6205, 6300-6304






1500

Two-leg universal pullers

- For both external and internal use
- Legs can be moved along crosspiece with stop nuts



	A min÷max mm	L mm	L1 mm	● mm	A1 min÷max mm	ESTATE I		€
1500/1	25÷80	100	135	17	70÷130	015000301	_98,50€	57,00€
1500/2	25÷130	100	135	17	80÷180	015000302	103,00€	59,00€
1500/3	50÷160	150	210	22	105÷220	015000303	171,00€	99,00€
1500/4	60÷200	150	210	22	120÷270	015000304	235,00€	136,00 €
1500/5	80÷250	205	280	27	160÷330	015000305	427,00€	248,00 €
1500/6	80÷320	205	280	27	160÷420	015000306	_501,00€	290,00€
1500/7	110÷520	205	280	27	195÷600	015000307	749,00€	435,00 €
1500/8	170÷640	230	310	36	260÷715	015000308	1,199,00€	693,00€



1517C

Combination two/three-leg self-locking pullers

- Leg holder with configuration for 2- or 3-leg use.
 Simultaneous leg opening.
 Self-locking effect.
 With shear pin.

- Size 2 with screw extension (total length of screw with extension: 360 mm)

	A min÷max mm	L mm	L1 mm	● mm			€
1517C/0	12÷140	145	250	18	015170500	260,00€	143,00€
1517C/1	20÷180	200	300	18	015170501	319,00€	176,00€
1517C/2	30÷280	270	300	18	015170502	396,00€	209,00€




HAMMERS AND CHISELS - GENERAL MAINTENANCE



24,00€

16.00€

Beta

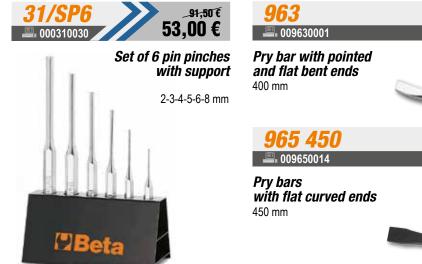

1370




	■ g	ݨ g	=:	€
1370/300	300	439	013700053	17,90€ 10,00€
1370/500	500	669	013700055	21,90€ 13,00€
1370/800	800	949	013700058	28,50€ 17,00€
1370/1000	1000	1180	013700060	34,00€ 20,00€
1370/1500	1500	1722	013700065	39,00€ 23,00€
1370/2000	2000	2181	013700070	46,00€ 27,00€





	Ø mm	å g	(==) (=================================	€
1390/22	22	134	013900022	21,90€ 13,00€
1390/28	28	230	013900028	27,00€ 16,00€
1390/35	35	365	013900035	37,00€ 21,00€
1390/45	45	689	013900045	59,00€ 34,00€
1390/60	60	1462	013900060	99,50€ 58,00€

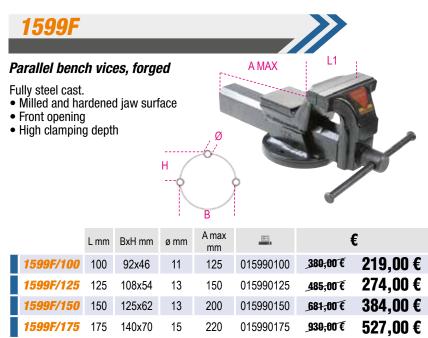



GENERAL MAINTENANCE - MEASURING TOOLS



Telescopic magnet with flexible head

• Lenght from 135 mm to 570 mm





1750KG10 ■ 017500100 225,80 € 130,00 €

Lever-operated grease gun, 10 kg, with high-pressure hose, 2 m

3 different pressure

- levels available: - 4 g at 275 bar
- 7 g at 206 bar
- 9 g at 137 bar






1650

Sliding gauge made from hardened stainless steel

- . Reading to 0.05 mm
- Spring locking

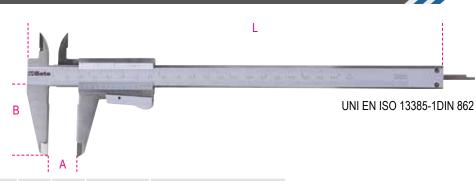

	A max mm	L mm	B mm	G mm	HxS mm	g	===		€
1650 150	12÷140	145	250	18	16x3	170	016500001	_71,00€	41,00€
<i>1650 200</i>	20÷180	200	300	18	-	230	016500002	_93,50€	54,00 €

1760TM(

986,00€ **560,00**€

Infrared thermal camera

Compact thermal camera for contactless temperature measurement, suitable for applications in building, mechanical, electric installation and heating industries.



TEMPERATURE
RANGE
FROM -20 ÷ +600 °C





IP54



- LCD TFT display, 2", 240x320
- Sensor, 32x32 pixels
- Acquisition frequency 7Hz
- Thermal sensitivity <347mK
- Automatic acquisition of hot and cold spots
- Camera for acquisition of images in BMP format (max. 100 images)
- Adjustable emissivity
- Power supply: 3 alkaline AAA batteries
- USB interface
- IP54
- Temperature range: -20 °C ÷ +600 °C
- Infrared band: 6.5÷14µm
- Visible/infrared image fusion: 0.5; 1; 2m
- Alarm function, selecting acceptable maximum and minimum temperatures



9710

LUBRIBETA UNIVERSAL

7-in-1 multipurpose unlocking lubricant

- 1. Unlocking
- 2. Lubricating
- 3. Detergent, degreasing
- 4. Rust protective
- 5. Deoxidizing
- 6. Waterproof
- 7. Antifreezing

	(=:) ************************************	€
9710 (1)	097100040	
9710 (2)	097101040	10,30 € 6,90 €



9740

BRAKE CLEANER

Brake cleaner

- · Ideal for cleaning brake discs and pads, engines.
- · Allows any grease and tar deposits to be removed, without leaving residue.
- · Also suitable as a general degreaser for metal surfaces.
- · Evaporates quickly. Does not damage plastics and rubber.

	E .	€
9740 (1)	097400050	
9740 (2)	097401050	7,35€ 4,90€



9841N **3** 098410120

31,00€

16,00€

BLACK SEAL

Black acetic-reticulation silicone sealant, resistant to high temperatures, with convenient pressure dispenser (pressure pack)

- · Withstands temperatures up to 240 °C
- Enables permanent elastic sealing
- Replaces preformed gaskets.
- The convenient dispenser allows easy (one-coated), accurate, uniform spreading of the product





9712

ULTRA SBLOCK

Unlocking lubricant, super-penetrating

- · Unlocking, deoxidizing, highly penetrating, for quick rust and oxidation removal from nuts, bolts, screws and gears.
- Waterproof, for water and humidity removal from treated parts.
- Highly resistant to cold and heat (-40 °C \div +150 °C)

400 ml



€

2,55€ 5.00€

9742

CONTACT CLEANER Cleaner for electric and electronic contacts

- Useful for cleaning and cleansing electronic contacts, circuits and electrical components in general
- Its non-thick consistency allows uniform, quick distribution on treated surfaces, removing grease and dirt, without leaving oily residue
- Eváporates guickly
- Does not damage plastics and rubber



400 ml

	==	€
9742 (1)	097420040	
9742 (2)	097421040	8,10 € 5,50 €

9720

9745

CARB CLEANER

Cleaner for carburettors and throttle bodies

- Specific for interior and exterior cleaning of carburettors, suction ducts and throttle bodies
- Totally removes carbonaceous residue, deposits and impurities
- · Evaporates quickly.
- · Does not leave oily residue

400 ml



CLIMA CLEANER

9712 (1) 097120040

9712 (2) 097121040

Air conditioner cleaner

9746

- Thick foam formulation.
- Suitable for industrial, civil and car air conditioners
- Removes dirt, deposits and odours from ducts
- Leaves a pleasant fragrance
- Supplied with a straw

400 ml



MULTI GREASE

Multipurpose arease

- · Particularly useful for lubricating chains, gears and moving metal parts as well as hinges, locks and pivots
- Resistant to friction and weather
- Highly resistant to high temperatures (up to 210 °C)
- Highly adhesive. Does not drip

400 m
©Beta
Multi
93W
A - See

	== 	€
9745 (1)	097450040	
9745 (2)	097451040	10,90€ 7.15€

	=	€
9746 (1)	097460040	
9746 (2)	097461040	13,50 € 8,50 €

	==	€
9720 (1)	097200040	
9720 (2)	097201040	8,65€ 5,60€







Rechargeable LED inspection lamp, with double light emission, articulated, can be rotated 180°, with swivel magnetic base and hook

• Double light emission:

front: LED COB, 60-700 lumens, can be adjusted with potentiometer spot (head):

LED SMD, 120 lumens, ON-OFF switch

- Rechargeable 3.6V 2600mAh Li-ion battery
- With USB-C port
- Supplied with 100-240V / 50-60Hz charger
- Charging time: 4h
- Battery life: front: 2.5-16h spot (head): 10h
- 3-LED battery level indicator
- Magnetic base (with neodymium) magnet), can be rotated 90°
- Swivel base hook
- IP54
- IK07





4 018380270

Rechargeable under bonnet LED lamp

• Triple light emission: 500/1000/2000 lumens

- Can be rotated 360°
- Length range: 116 ÷ 188 cm
- Aluminium body
- Nonslip rubber hooksUSB-C charge
- Supplied with battery charger Input: 100-240V ~ 50/60Hz Output: DC 5V 2000 mA
- IP 20
- IK 07





2 charging modes: charge via lamp USB port charge via internal battery **USB** port







34.00 €





210,50€ 20.00€



Rechargeable battery with USB-C port for under bonnet lamp item 1838E

• Li-lon 3.6V - DC 5V - 2000 mA

1838/11LED

4 018380111

188,00€ 103.00€

Rechargeable inspection lamp with ultra-high brightness LEDs, lithium polymer battery

- · Compact body made of antislip rubber
- With charging station, 110-230Vac













1838COMPACT **018380011**

Rechargeable, compact LED lamp . Dual light emission: main and spot

• 3 light intensities: main COB LED 300 - 120 lumens spot SMD LED 150 lumens

 Rechargeable battery: Li-lon3.7 V, 1500 mAh • Charging time: 2.5h

• Battery life: main: 7/3.5h spot: 6h

 Belt clip/pocket • IP65; IK07

· USB-C cable included







39,00€



1839W/K1

3 018390810

292,00€ 152,00€

Kit of wireless lamps 1838SW and 1838POCKET, with compatible charging base 1839BRW

- Wireless rechargeable, articulated LED inspection lamp 1838SW
- · Wireless rechargeable, articulated pocket LED spotlight 1838POCKET
- Wireless charging base 1839BRW, compatible with the lamps of the kit

Save up to

1838SW

140,00 €



· 018380142

64,00€

Rechargeable, articulated LED inspection lamp and wireless charging


- Rechargeable 3.6V 3.350mAh Li-ion battery
- · 2 charging modes:
 - wireless 1839BRW base
 - power supply with USB-C port
- · Charging time:
- 6.5h with wireless charging base
- 4.5h with power supply
- Battery life: front: 3-5h
 - spot (head): 7h
- 3-LED battery level indicator

- Base can be rotated 180°
- Nonslip rubber body
- Double swinging hook
- · Magnets on base and back
- IP65
- IK07





(((o)))



intensities: 250 - 500 -1000 lumens

- spot (head): LED SMD, 200 lùmenś













1838POCKET

3 018380080


77,50€ 45,00€

Articulated pocket LED spotlight, with dual light beam and wireless charging

- Rechargeable 3.7V 2600mAh Li-ion battery
- · 2 charging modes:
- wireless 1839BRW base
- power supply with USB-C port
- Charging time:
 - 4.5 h with wireless charging base
 - 4 h with power supply
- Battery life: main light: 3-9h - spot light: 4.5 h
- 3-LED battery level indicator
- Can be rotated 210°

- · Nonslip rubber body
- Magnetic base
- 1 magnet on base
- · Supplied with a USB-C cable
- IP65
- IK07





- main light: LED COB, 3 light intensities: 160 - 400 - 800 lumens

- spot light: LED SMD, 250 lumens



spot light: 18°





((o)) (E







104,50€ 61.00€

Wireless charging base, compatible with 1838POCKET, 1838SW, 1836AW, 1833MW and 1833XSW inspection lamps

- Two charging positions with magnetic connection, for simultaneous use
- With pull-out support for wireless mobile phone charging
- . Charging status LED indicator
- Max. input: 10W x2
- Input: AC 100-240V 50/60Hz
- Output: DC 12V 1.5A DC 9V 2A DC 5V 3A
- USB-C port
- IP20
- IK07















POWER TOOLS

Beta

Let us introduce our range, Beta Power Tools, which comprises reliable, durable work instruments designed to satisfy every professional's requirements.

Beta's family of power tools comprises:

- BATTERY TOOLS
- CORDED TOOLS

The new range of battery tools includes 20V and 12V high-performance machines.

The new range of battery tools includes 20V and 12V high-performance machines.

We at Beta relied on these hallmarks

to develop a comprehensive line of battery tools, ranging from the high-torque impact drill to the impact wrench with ½" square drive. All of Beta's new power tools are equipped with brushless motors and first-rate interior mechanisms, for significantly improved performance and durability of the tool.

The impact wrench with a maximum unscrewing torque of 1200 Nm is no doubt the flagship power tool of the new range, an ideal work partner for anybody who needs unparalleled power and performance.



318.00 €

3-YEAR

259,00€ 153,00 €

1972/K12V-10

153,00€

Ultracompact drill, 12V

Ultracompact: no more than 170 mm in length; ultralightweight: no more than 1.1 kg, with battery, and perfectly balanced

Features:

- Double mechanical speed with steel gears and 20-position clutch
- Torque up to 30 Nm and 1300 rpm (400 rpm in 1st gear); drills diameters up to 10 mm in steel and 20 mm in wood
- 2Ah batteries and charge indicator on drill body
- Ergonomic nonslip handle
- Front LED
- 10-mm autochuck
- Belt clip (right/left side)
- Selector switch, screwing-unscrewing-locking modes (for transportation)
- Supplied in a hard case with 2 lithium ion batteries (2 Ah) and quick charger (50 min)



1986/K20-4AH+2AH

3 019860<u>022</u>

20V kit of angle grinder + 2 Ah battery

Composed of:

• 1986/K20V-125

Angle grinder, brushless, 20V, with slide switch, disc diameter 115/125 mm, protection against accidental restart, tool-less disc cover, additional handle.

Supplied in a hard case complete with 2 4 Ah batteries and quick charger.

INCLUDED IN PRICE

additional 2 Ah battery 1994B 20V-2AH





<u>1986/20V-125BMC</u>

1019860025

Angle grinder, 20V BRUSHLESS, (machine body)

Digital BRUSHLESS motor for increased power, reduced energy consumption, extended motor service life, improved power supply from button.

Protection against accidental restart
 Additional bandles are be alread on both

Additional handle, can be placed on both sides

• Tool-less disc cover (quick release)

Spindle lock device for quick disc changes

• Lock on/off slide switch

 Air vents protected against dust infiltration and providing optimal cooling

 Disc diameter (not included): 125/115 mm

 Supplied in a hard case, without batteries and charger









Digital BRUSHLESS motor, for significantly improved performance: increased power, reduced energy consumption, extended motor service life, improved power supply from button.

ADDITIONAL SIDE HANDLE, for high-torque operation

1984/K600-4AH+2AH

796,00€ 406.00 €

- 3 different torque settings and rpms in screwing mode
- Up to 600 Nm unscrewing torque

1984/K1200-6AH+4A

996,00€ 494,00€

- · 3 different torque settings and rpms in screwing mode
- Up to 1200 Nm unscrewing torque





1989RCB

Construction site radio, 20V

Multifunctional audio entertainment: digital (DAB; BT) and conventional FM radio. Suitable for use at construction sites or for leisure. Sturdy radio with compact, modern, design, degree of protection IP54.

Powerful stereo sound provided by two powerful 16W side loudspeakers.

Built-in alarm function.

Complete with carrying handle and shockpro of corner protection.

With AUX connection and protected USB connector for phone connection and charge.

Can be used with Beta's 20V batteries (optional) or power supply cord (included).













219.00 €

INCLUDED:





- FM radio frequency range: 87.5 108 MHz
- DAB radio frequency range: 174 240 MHz
- Number of FM and DAB stored stations: 30

1273MQ/D6 3 012730851

Set of 6 screwdrivers



☆1000 V









5.00€

1760PT/N

017600155

Voltage and continuity tester, 1000 V

Voltage and continuity tester: accuracy and reliability with up to 1000V power. Equipped with a high-visibility digital screen and a convenient self-test function, the tool ensures both accuracy and reliability in each measurement, which makes it a must-have for every professional.



- Voltage: 24÷1000VAC / 6÷1000VDC
- · Bar voltage indicator: 6-12-24-50-120-230-400-690-1000
- Accuracy: ± (3% + 3)V
- Response time: < 1s (09%)
- Maximum absorbed current @1000V: < 3,5mA
- Contact-free voltage detection: > 90VAC
- Phase rotation test:100÷1000VAC (50/60Hz)
- Phase angle: 120° ±5°
- Continuity test:0±1.3 MΩ
- Current (continuity test): ≤5 µA
- Pollution level
- · Power supply



1997MQ/GM

Composite insulating gloves

☆1000 V

EN 60903 EN 61482

CLASSE 0

1997MQ/GM 9 1997MQ/GM 10

€ G 019970109 187,00 € 105,00 € 019970110 187,00€ 105,00€ 10

1760OHM/2

Megohmmeter for high voltage insulating testing

Our megohmmeter is synonymous with technology and accuracy for really professional measurements. With an insulating capacity up to 100 $G\Omega$ at 1000V voltage, this instrument is ideal for professional, accurate measurements in all electrical applications. Particularly suitable for electric and hybrid cars.

Features:

- Insulation test up to 100 G Ω with 1000V voltage
- · Large direct reading display, backlit
- Water protection: IP67
- Rubber terminal base for enhanced operating comfort
- Double insulated terminals CAT IV 600V, CAT III 1000V

1~1KHz

• Ideal for electric and hybrid cars



1,415,00€



 $\pm (0.1\% + 3)$

AC voltage: DC voltage: Resistance: Insulation test @1000V: Frequency

Measuring range 10V - 600V 0V - ±600V ±(1.5% +5) ±(1.5% +5) 0.01Ω - 200Ω $\pm (2\% + 5)$ 0.01Ω - 100GΩ ±(1.5% +5)

2115PL-MQ32

Assortment of 32 insulated tools for hybrid cars, in plastic tool box with soft thermoformed tray

1 2	uantity/Description 1/2" reversible ratchet single ring wrenches 10-12 mm	Beta N. 920MQ/55A 89MQ
.1	magnetic bit holder, insulated ® 1/4"	850MQ
10	set of 10 bits with magnetic bit holder	861TX/A10
	○ T7-T8-T9-T10-T15-T20-T25-T27-T30-T40	
7	hexagon sockets © 8-10-12-13-14-17-19 mm	920MQ/A
1	1/2" square drive extension bar 125mm	920MQ/21
1	1/2" square drive extension bar 250mm	920MQ/22
1	slip joint pliers, boxed joint 250mm	1048MQ
1	combination pliers 1000V = 180mm	1150MQ
1	extra-long bent flat nose pliers = 160mm	1164MQ
2	screwdrivers for cross head Phillips® screws, 1000V 4.5X80-6X100mm	1272MQ
3	screwdrivers for headless slotted screws, 1000V ● 3X100-4X100-5.5X125	1274MQ
1	insulating gloves, made from latex G2	1997MQ/GM
1	tool box, long series, made from plastic	CP15I
•	tool box, long collect, made from places	01 102








2029EM

3. 020290300



Tool case with assortments of 43 maintenance and repair tools for hybrid and electric vehicles





2400 RSC24/6-VEM

3 024004016

Quantity/Description

plastic barrier chain

3/8" drive, T-handle

electrician's scissors

3/8" drive reversible ratchet

cable stripping knife, insulated

prohibition signs

12

aluminium warning signs

insulating mat

Mobile roller cab with 6 drawers and assortment of 81 repair and maintenance tools for hybrid and electric vehicles






1777MQ/U M161


₩ 480x227x408 mm



HOSE REEL

- · Automatic hose reel, shockproof plastic body, for air or water
- Max. operating pressure: 15 bar
- Braided polyurethane hose
- Polypropylene frame
- · Device for automatically fixing hose at required length
- · Rack mechanism can be disabled to keep hose pulled
- Water operating temperature range: -5 °C / +50 °C
- Supplied with a 180° swivel bracket and an additional quick connection bracket









1 019000080

195,50€ 05,00€

Ø GAS BSP 1/4"

Automatic spring hose reel with 8x12 mm cable • Cable length 10 m

1900M 8X15

4 019000085

142,00€

Automatic spring hose reel with 8x12 mm cable

• Cable length 15 m

Ø GAS BSP 1/4"

1900M 10X15

3. 019000115

278,00€ 153,00 €

Automatic spring hose reel with 10x14 mm cable

• Cable length 15 m

Ø GAS BSP 3/8"



Ø GAS BSP 1/2"

1900M 12X15

019000125

Automatic spring hose reel with 12x16 mm cable

• Cable length 15 m

1844 15-H05/SCK

3 018440316

Automatic cable reel, with 3Gx1.5 mm² cable and SCHUKO type socket and plug

- 3Gx1.5 mm² cable
- With thermal protection switch
- Max. power (rolled up): 1500W (230V-20°C)
- Max. power (unrolled): 2500W (230V-20°C)









264,00€





NEW

Since 2022 the established, authoritative welding specialist, Helvi, and Beta Utensili have been working together to develop ground-breaking technologies. This joint effort has translated into the new range of Beta by Helvi welding machines, which boast ultimate performance in line with its high quality standards.

Easy-to-use inverter welding machines with excellent welding characteristics for all types of electrodes. With overvoltage and overtemperature control

and electrode anti-sticking function. Compact and lightweight, ideal for home maintenance jobs, light carpentry and maintenance jobs.



1498/PR

Semiprofessional battery

- For lead-acid storage batteries
- Voltage/current selectors
- Ammeter
- · Automatic thermal overload protector
- · Reverse polarity protector



Conventional battery charger, 6/12 V



Conventional battery charger, 12/24 V



Conventional battery charger, 12/24 V



1498/PR14 1498/PR17 1498/PR20

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	140 W	300 W	390 W
Voltage	6/12 V	12/24 V	12/24 V
Maximum current	11 A	12,5 A	16 A
Charging current	7,5 A	8,5 A	11 A
Charging capacity	112 Ah 15h	128 Ah 15h	165 Ah 15h
Charging positions	2	2	2





Conventional battery charger, 6/12/24 V

For large charging stations

- For lead-acid storage batteries
- Voltage/current selectors
- Ammeter
- Automatic thermal protector



Conventional battery charger, 6/12/24/36/48 V

1498/PR25 1498/PR35B

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	620 W	1830 W
Voltage	6/12/24 V	6/12/24/36/48 V
Maximum current	25 A	38 A
Charging current	17 A	25A
Charging capacity	255 Ah 15h	375 Ah 15h
Charging positions	6	12



BATTERY CHARGERS

1498/AM30



Automatic conventional battery charger 12/24 V

• For AGM, GEL, Lead-Acid and Start/Stop batteries

· Electronic control of charging current

• Charging status light indicators

- · Charging current regulation via potentiometer
- Automatic charging function
- Maintenance function



Power supply (1ph)	230 V - 50/60 Hz
Power	720 W
Voltage	12/24 V
Maximum current	30 A
Charging current	20 A
Charging capacity	300 Ah 15h
Charging positions	∞

1498/SP

Conventional battery charger / starter, 12 V

- For lead-acid storage batteries
- Charging current selector
- Ammeter
- . Thermostatic long start protector
- Short-circuit protection fuse
- · Reverse polarity protector



1498/SP150 **--- 014980745**

129,00€

Conventional battery charger, 12 V

349,00€ 1498/SP250 199,00€ **014980746**

Conventional battery charger, 12/24 V

1498/SP150 1498/SP250

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	190 W	650 W
Voltage	12 V	12/24 V
Maximum current	15 A	27 A
Charging current	11 A	18 A
Max. boost current	120 Acc	200 A
Starting current	85 A	135 A
Charging capacity	165 Ah 15h	270 Ah 15h
Charging positions	2 + boost	2 + boost

1498/SC



Battery charger / starter, 12/24 V, wheeled

- For lead-acid storage batteries
- · Slow/fast charging current selector
- Ammeter

- Thermostatic long start protector
- Short-circuit protection fuse
- · Reverse polarity protector









1498/SC441 1498/SC540 1498/SC341 1498/SC640

Power supply (1ph)	230 V - 50/60 Hz			
Power	1080 W	1320 W	1440 W	1800 W
Voltage	12/24 V	12/24 V	12 V	12/24 V
Maximum current	45 A	55 A	60 A	75 A
Charging current	30 A	36 A	40 A	50 A
Max. boost current	340 Acc	380 Acc	480 Acc	550 Acc
Charging capacity	375 Ah 15h	450 Ah 15h	525 Ah 15h	600ww Ah 15h
Charging positions	3 + boost	3 + boost	6 + boost	6 + boost



Beta

NEW

BATTERY CHARGERS

1498/RP

Conventional battery charger / starter, 12/24 V

- For lead-acid storage batteries
- Charging current selector
- Ammeter
- · Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector







1498/RP380 1498/RP480

230 V - 50/60 Hz	230 V - 50/60 Hz
900 W	1320 W
12/24 V	12/24 V
38 A	55 A
25 A	36 A
280 Acc	450 A
200 A	315 A
270 Ah 15h	450 Ah 15h
2 + boost	6 + boost
	900 W 12/24 V 38 A 25 A 280 Acc 200 A 270 Ah 15h

1498/AT

Battery charger / starter, 12 V

- For lead-acid storage batteries
- · Charging current selector
- Ammeter
- Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector





Battery charger / starter, 12 V



Battery charger / starter, 12/24 V

1498/AT300 1498/AT500

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	300 W	890 W
Voltage	12 V	12/24 V
Maximum current	25 A	37 A
Charging current	20 A	30 A
Max. boost current	300 Acc	450 A
Starting current	210 A	320 A
Charging capacity	375 Ah 15h	540 Ah 15h
Charging positions	2 + boost	6 + boost



Battery charger / starter, 12/24 V, wheeled

1498/AT100



1,745,00 €

1498/AT1300 2,999,00 € 1.715,00 €

1498/AT2000 2.419,00 €

1498/AT701 1498/AT1001 1498/AT1300 1498/AT2000

Power supply (1ph)	230 V - 50/60 Hz			
Power	1800 W	2200 W	2900 W	3600 W
Voltage	12/24 V	12/24 V	12/24 V	12/24 V
Maximum current	75 A	90 A	120 A	150 A
Charging current	50 A	60 A	80 A	120 A
Max. boost current	550 Acc	980 A	1280 Acc	2000 A
Starting current	400 A	560 A	850 A	1100 A
Charging capacity	600 Ah 15h	1350 Ah 15h	1800 Ah 15h	2250 Ah 15h
Charging positions	6 + boost	14 + boost	12 + boost	12 + boost



BATTERY CHARGERS

1498/DG





Electronic battery charger / starter, 12/24 V, wheeled

Equipped with CPS (car protection system) technology, which allows boost function to be activated and deactivated fully automatically, to protect electronics on board vehicle.

- For Lead-Acid, AGM, Gel, Ca/Ca and Start/Stop batteries
- Electronic charge control via microprocessor
- · Charging time setting
- · Digital display
- · Charging status LED indicators
- Control system for: reverse polarity, overcurrent, battery failure indication. safe start, protected start



Battery charger / starter, 12 V



Battery charger / starter, 12/24 V

1498/DG540E 1498/DG1100E

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	1320 W	2400 W
Voltage	12/24 V	12/24 V
Maximum current	55 A	100 A
Charging current	36 A	70 A
Max. boost current	380 Acc	580 Acc
Starting current	260 A	400 A
Charging capacity	810 Ah 15h	5000 Ah 15h
Charging positions	4 + boost	4 + boost + supply

1498H

Electronic multipurpose battery charger, 6-12V

Electronic battery chargers 1498H: innovation and technology made to work for professionals! Fitted with LCD displays and 3-colour LED indicators, they can be used with all types of batteries, both lead-acid and lithium. The electronic control card provides full protection against unexpected events. The 9 automatic charging steps ensure fast, efficient charging, with recovery and desulphation features.

- LCD display
- 3-light intensity LED
- · Charging and charge maintenance
- Protection against reverse polarity, short-circuits, overheating, overloading, overtemperature
- Spark protection
- · 9 charging steps

- Floating system
- Functions: battery recovery, battery test and desulphation

1498H/16A

014980216

- · Clamp holder
- · Reclining fixing hook
- Supplied accessories: cable with clamps, cable with eyelets







176,00€ 99,00€

Electronic multipurpose battery charger. 6-12 V



Electronic multipurpose battery charger, 12/24 V

341,00€ 1498H/25A 193.00 € **014980225**

Electronic multipurpose battery charger, 12/24 V

Electronic multipurpose battery charger. 12-24 V

1498H/4A 1498H/8A 1498H/16A 1498H/25A 230 V - 50/60 Hz 230 V - 50/60 Hz 230 V - 50/60 Hz Power supply (1ph) 230 V - 50/60 Hz

i owor suppry (ipin)	200 V 00/00 112	200 1 00/00 112	200 1 00/00 112	200 V 00/00 112
Charging current	1-4 A	2-8 A	4-16 A	6-24 A
Battery types	Pb - GEL - Ca/Ca - AGM - Start/Stop - Lithium (LiFePo4)			
Charging capacity	5-80Ah (LiFePO4 1-80Ah)	10-160Ah (LiFePO4 2-160Ah)	20-360Ah (LiFePO4 4-360Ah)	30-550Ah (LiFePO4 6-550Ah)
Maintenance capacity	5-120Ah (LiFePO4 1-120Ah)	10-250Ah (LiFePO4 2-250Ah)	20-550Ah (LiFePO4 4-550Ah)	30-800Ah (LiFePO4 6-800Ah)
Power supply (DC)	N/A	13.8V - 5A	13.8V - 12A	13.8V - 20A
Output voltage	6-12V	12-24V	12-24V	12-24V
Degree of protection	IP65		IP	20



1498BC/12

3 014980040

385,00€ 219.00€

Multipurpose portable starter, 12V

• Device protecting against polarity reversal, short-circuit, overcurrent, overcharge and overheating

Supplied with:

- Protective case
 Cable with starting clamps
 USB ports for charging electronic devices
- LED battery charge indicator
 USB and USB-C cable
 Mains power supply

- Multifunction LED torch














Portable high-performance starter, ultralightweight

The microprocessor provides full protection against:

- Polarity reversal
- Short circuits
- Incorrect voltage
- Overloads
- Underdischarge
- Overcharge
- Overtemperature









Portable high-performance starter, 12-24 V, ultralightweight, suitable for use on cars, commercial vehicles and trucks.







1,945,00€





Latest-generation battery LifePo4. Includes memory saver. Weighs no more than 2.5 kg.









549.00€



1498LT/12 1498LT/12-24

Operating voltage	12V	12/24V
Continuous amperage	800 A	2000/1000 A
Maximum starting amperage	2000 A	5000/2500 A
Peak amperage	4000 A	10000/5000 A
Cable	1000 A	1000 A
Cable length	500 mm	1600 mm
Battery type	4 celle LifePo4	4 celle LifePo4
Memory saving function	YES	YES
Dimensions	260x135x72 mm	350x240x140 mm

BATTERY CHARGERS - DIAGNOSTICS



1498EL/12 567,00€ 318.00€

Portable starter, 12V

• Pickup current: 1800A · Battery capacity: 22 Ah



Portable starter, 12/24V

• Pickup current: 3600A 12V - 1800A 24V

• Battery capacity: 2x 22 Ah



407,00€ 235,00 €

1498TB/12-24N

Digital battery tester, 12-24V, with built-in printer

• allows the following to be tested: battery, alternator, starter and system

- · reverse polarity protector
- Fitted with software for connecting instrument to PC
- Backlit display
- · Compact, shockproof frame
- 9 language software

Technical data:

- Applications: 12V and 24V batteries
- Operating range: 100-2000 CCA
- Reference standards: CCA,SAE,DIN,EN,IEC,JIS, MCA, GB, BCI, CA
- Supported batteries: PB, WET, GEL, AGM, AGM FLAT, EFB, SLI
- Voltmeter: 9V-30V
- Cable length: 1800 mm
- Supported languages: Italian, English, French, German, Spanish, Polish, Dutch, Hungarian, Portuguese
- Included accessories: USB cable, 3 printer paper rolls



1497/C94 **3.** 014970300

Assortment of 94 car testing connectors for use with main diagnostic tools

- 2 t-taps
- 2 potentiometers
- 2 warning lights2 SRS connectors
- 2 alligator clips
- 2 acicular probes
- 2 prods

- · 2 dual banana connectors
- 4 single banana connectors
- 24 flat male terminals 0.6÷6 mm
- 12 round male terminals 1.6÷3.9 mm
- 24 flat female terminals 0.6÷6 mm
- 12 round female terminals 1.6÷3.9 mm



₩ 430x390x100 mm



1497/C23

3 014970200

263,00€ 153,00€

Assortment of 23 tools for releasing electrical connectors



1760DGT/2

3 017600008

494.00 €

Digital automotive multimeter, portable, with 2-channel oscilloscope and waveform generator



Kit Contents:

- Multimeter tips
- 2 BNC crocodile clips for oscilloscope
- Tip probe for oscilloscope (1X and 10X)
- Battery charger
- Nylon sheath

Max. voltage	600V DC
Max. current	10A DC
Max. resistance	40MOHM
Max. capacity	100uF
Display	2.8" colour TFT
Resolution	320 x 240 pixels
Power supply	100V-240V AC, 50Hz-60Hz; DC INPUT 5V DC-2A
Battery	2 x 2600 mAh



Technical data:

- Technical data:

 Display: 2.8" colour TFT
 Resolution: 320 x 240 pixels
 Power supply: 100V-240V AC, 50Hz-60Hz; DC INPUT 5V DC-2A
 Battery: 2 x 2600 mAh
 Dimensions: 199 x 98 x 40 mm
 Weight: 624g
 Multimeter Specifications:
 Test: Voltage, Current, Resistance, Capacity, Diodes and On-Off
 Max. voltage: 600V AC-DC
 Max. resistance: 40M0HM
 Max. capacity: 100uF
 Oscilloscope Specifications: Horizontal
 Bandwidth: 40MHz
 Sampling frequency range: 250MSa/s (single channel) 125MSa/s (double channel) (double channel) SEC/DIV range: 5ns/div ÷ 500s/div 1,2,5 sequence

- Security Parige: Sits/div ÷ 5005/div 1,z,5 sequence Vertical
 VoLTS/DIV range: 10mV/div÷10V/divat BNC input
 Selectable analogue, bandwidth limit, typical: 20MHz
 Low frequency response (-3db): ≤10Hz a BNC
 DC Gain Accuracy: ± 3% for Normal or Medium acquisition mode, 10V/div ÷ 10 mV/div

- 10V/dN ÷ 10 mV/dN Trigger Type: Edge Mode: Auto, Normal, Single Slope: Rising, Falling, Rising, & Falling Source: CH1, CH2

- Source: CH1, CH2
 Input
 Coupling: DC, AC or GND
 Supported probe attenuation factors: 1X, 10X, 100X, 1000X
 Arbitrary waveform generator
 Waveform frequency: Sine (1Hz÷25MHz), Square (1Hz÷10MHz), Ramp (1Hz÷1MHz), EXP (1Hz÷5MHz)
 Width: 2.5Vpp (50Ω) 5Vpp (high impedance)
 Output impedance: 50Ω

1760DGT

4 017600005

314,00€ 154.00€

202,50€ 109.00€

Digital automotive multimeter

Technical Data:

RPM (tachometer):

For 2 and 4 cylinder engines RPM4 600 - 4000 RPM RPM4 600 - 12000 RPM (x10 RPM) RPM2/DIS 300 - 4000 RPM RPM2/DIS 300 - 6000 RPM (x10 RPM)

• Dwell angle: 4-8 CYL

 DC voltage: 400mV-4/40/400/1000V
 AC voltage: 4/40/400/700V • DC current: 40/400mA-4/20A • AC current: 40/400mA-4/20A

• Resistance: 400Ω-4/40/400kΩ-4/40MΩ

• Capacity: 40/400nF-4/40/100μF

• Frequency: 5/50/500Hz-50/500-10MHz • Duty cycle: 0.1 % - 99.9%

• Pulse amplitude: 1 - 10ms

• Diode test: Test current 0.3mA

Continuity: <150Ω - Test current <0.3mA
 Display: High-contrast, backlit 4-digit LCD

• Overvoltage: Category II 1000V

Auto power off: 30 minutes
 Power supply: 1 9V battery (included)
 Inductive clamp (included)

2 tips (included)
Soft cloth case (included)

Operating manual





Digital multimeter **SPECIFICATIONS**

DC voltage: 200 mV-2/20/200/1000 VAC voltage: 2-20/200/700VDC current: 2/20/200 mA-20 AAC current: 2/200 mA- 20 A Resistance: 200Ω - 2/20/200 kΩ - 2/20 MΩ

Capacity: 2/20/200 nF - 2/200 µF

Temperature: -20° + 1000°C/ -4 °F ~ +2000°F

Frequency: 20kHz

Power supply: 1 9V battery (included)









3 017600002

261,00€ 151.00 €

AC/DC amperometric clamp, 80A

Specifically designed to measure low current leakage or absorption values on vehicles

- Range: 1mA-80A AC/DC
- Torch function with white LED
- Backlit LCD display
- Zero setting function
- Hold function
- Auto power off
- Power supply: 2 1.5V AAA-type batteries



760PA/AC-DC

1 017600000

387,00€ 219,00€

Amperometric clamp and digital multimeter

SPECIFICATIONS

DC voltage: 0.1mV ÷ 600V AC voltage: 0.1mV ÷ 600V AC current: 0.01A + 1000A DC current: 0.01A ÷ 1000A Resistance: $0.1\Omega \div 40M\Omega$ Capacity: 0.001nF ÷ 40 µF Frequency: 0.001kHz ÷ 4kHz Temperature: -40°C ÷ 1000 °C -40°F ÷ 1832°F



1760PA/AC-DC2000

4. 017600003


439,00€

Amperometric clamp with digital multimeter and data connection

Measurable parameters:

- DC voltage: 0.1mV ÷ 1000V
 AC voltage: 0.1mV ÷ 1000V
- AC current: 0.01A ÷ 2000A
- DC current: 0.01A ÷ 2000A
 Resistance: 0.1Ω ÷ 60MΩ

- Resistance: 0.112 000012 Capacity: 1nF ÷ 6000 µF Frequency: 10kHz ÷ 20kHz Temperature: -20 °C ÷ 1000 °C -4 °F ÷ 1832 °F
- Power supply: 3 1.5V batteries, type AA (included)









2000A

3 017600161

271,00€ 143,00€

Combination contact/non-contact digital tachometer

TECHNICAL DATA

- · For measuring:
- non-contact rotational speed (rpm)
- contact rotational (rpm) and linear surface speed (m/min or ft/min).
- 5-digit LCD display.
- Scale:
- non-contact speed 2.5÷99,999 rpm contact speed 0.5÷19,999 rpm
- linear surface speed 0.05÷1,999.9 m/min.
- Frequency: 0.8 sec.
- Power supply: 4 1.5V batteries (included), AA size, or 6V power supply unit (not included).



Supplied with the following:

- Adaptor for contact tip measurement
 Male (contact) rubber tip (2 pcs.)
- Female (contact) rubber tip (1 pcs.)
- Linear measurement tape (1 pcs.)
- Reflecting tapes
- Instruction manual
- Plastic case







1760/IR500

3 017600350

105,00€

Digital infrared thermometer with dual laser aiming system

TECHNICAL DATA

TECHNICAL DATA

Temperature range: $-50 \div 500 \,^{\circ}\text{C}$ ($-22 \div +932 \,^{\circ}\text{F}$)

Display resolution: $0.1 \,^{\circ}\text{C}$ ($0,1 \,^{\circ}\text{F}$)

Emissivity: $0.1 \div 1$ adjustable

Accuracy: $-50 \,^{\circ}\text{C} \div +20 \,^{\circ}\text{C}$ ($+/-3 \,^{\circ}\text{C}$); $20 \div 500 \,^{\circ}\text{C}$ ($+/-2\% \,^{\circ}\text{or}$ 2 $^{\circ}\text{C}$)

Optical resolution (D:S): 12:1

Auto power off: ca. 10 seconds
Operating temperature: 0 °C ÷ 50 °C
Storage temperature: -20 °C ÷ 60 °C
Power supply: 1 9V battery





961N

009610030

Electronic videoscope with flexible, rotating probe

- TFT LCD 5" screen Supports SD cards
- Video and image recording
- 4 LEDs
- Power supply via USB port (built-in battery)Rotating probe
- High resolution



































052000201

Gearbox/transmission trolley with liquid recovery system

Inclined plane and drain holes allow liquids to be recovered in collection tank

Fitted with:

- 4 swivel castors, including 2 with brakes
- Tool drawer
- Pull-out liquid collection tank; capacity: 7 I
- 2 shelves









Exhausted oil drain unit

- Level indicator
- · Big diameter pan with breakwater grate; capacity: 12 I
- Pneumatic tank emptying through 1.8 m pipe
- Tool tray



824,00€ 475,00€

Exhausted oil drain unit, wheeled, with 90 I tank







1.460,00€ 825.00 €

Exhausted oil drain unit / vacuum cleaner, wheeled. with 90 I tank and pre-chamber

- Transparent pre-chamber: capacity 9.5 l
- Pneumatic tank emptying through 1.8 m pipe

Standard accessories:

- 1 hard probe, Ø 5x700 mm
- 1 flexible probe, Ø 5x700 mm
- 1 hard probe, Ø 6x600 mm
- 1 flexible probe, Ø 6x700 mm • 1 flexible probe, Ø 7x700 mm
- 1 flexible probe, Ø 8x700 mm
- · Adapters for VW, BMW, CITROËN



3 018770180

638.00€ 279,00€

Exhausted oil drain unit, wheeled, with polyethylene

- Tank capacity: 40 I
- · Large oil pan made of PP
- Level indicator
- Pneumatic drum emptying



Exhausted oil drain unit for 1 I bottles

- Fits up to 4 bottles at a time
- Supplied with 2 2-I jerrycans

FITS UP TO 4 BOTTLES AT A TIME











19,00€

Non-return quick coupling for funnel item 1758B

For Renault 1.5 dCi engine





NON-RETURN


Non-return funnel with quick couplings

Particularly suitable for VAG cars.













Diesel oil gun capacity: 1.5 l

Can be used to:

- · Fill diesel oil filters
- · Fill Cerina tank

Kit contents:

- 2 pipes with female quick couplings for connecting diesel oil pipes
 • 2 male quick couplings, made of metal
- 1 cone-shaped adapter for rubber pipes

26,00€ 1756B 14,00€ **=** 017560220

Capacity: 1 I

Pen oiler

· With non-slip knurl

Operating temperature: -10 °C - +60 °C

 Minimum density of SAE 10 oil





Siphon syringe, compatible with petrol

Syringe capacity: 200 ml









Oil suction gun, 200 ml, made from polypropylene




- For transferring oil and brake fluid • Operating temperature: +0 °C \div +50 °C
- Not suitable for fuel and flammable liquids
- Usable minimum oil density: lower than SAE30






45,50€ 26,00€



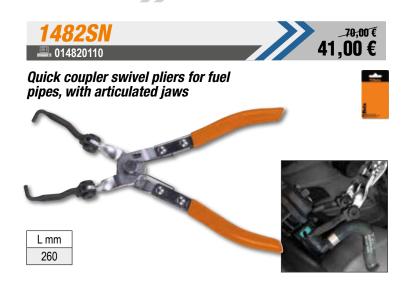



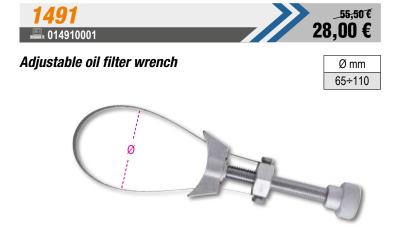





Oil filter wrench with swivel ratchet head





Set of 28 oil filter wrenches

• For tightening and loosening oil filters

• 1/2" female drive 530x400x110 mm • In plastic case Sizes included in kit (Ø mm / n° lati) 1493: 65/14 - 67/14 - 68/14 -73/14 - 74/15 - 76/15 -75.77/15 - 76/14 - 76/8 -78/15 - 80/15 - 82/15 -86/16 - 90/15 - 92/10 -93/15 - 95/15 - 100/15 106/15 - 108/15 1493PF (Purflux)

66/6 - 76/12 - 76/30- 86/18 93/36 - 93/45 - 96/18 - 108/18

Includes 1 adjustable oil filter wrench Ø 65÷120 mm





Specifications:

- Operating voltage: 12 V
- 2 service hoses with quick couplers
- 2 tanks (capacity: 1 I each)



Special detergents can be used to periodically clean the injectors and the intake manifold in diesel and petrol engines, removing carbonaceous deposits and combustion residues.



DPF/FAP® system cleaning machine

Supplied with:

- 1 2-m-long feed pipe
- 1 quick coupler + hose nozzle for differential sensor hoses
- 1 niplex M18x1.5 with hose nozzle for direct connection to lambda probe
- 1 extension hose
- 1 DPF/FAP® spray nozzle
- 1 magnetic pipe support
 1 DPF/FAP® pipe with adjustment cable gland plus

niplex M14/16/18 mm for connecting lambda probes



Technical specifications:

DPF and FAP® systems damaged by soot and ash deposits. Results can be checked by self-diagnosis, which allows soot mass and differential pressure in diesel particulate filter before and after treatment to be determined.

Portable induction heater

· Heats and loosens bolts, hubs and bearings without using flames.

· Allows any type of ferromagnetic metal to be heated.

- **Technical data:** • Input voltage: 230V AC, 50/60 Hz
- Input current: max. 7,5A
- Power: max. 1.75 kW

Benefits

- 1 Time saving: quick, extremely accurate heating
- 2 Fire safety: does not produce flames, maximum operator safety
- 3 Functional: can be used with one hand, and coils can be easily interchanged

Fields of Application:

- Automotive industry
- Industrial maintenance
- Aviation industry
- Naval industry
- Petrochemical industry



--- 018520520

Contact coil




74,00€







Combination collar and hose clamp pliers with extension





46,00€

Combination collar and hose clamp pliers

The multi head jaws inclined at 45° allow most commercially available collars to be clamped.



960KC-M8/M9/M10 **3** 009600801

510.00€ 294.00 €

Assortment of tools for removing broken or damaged glow plugs



960PI/K36

3 009600218

Kit of brushes for cleaning injector seats

Kit contents:

12 nylon brushes, 8÷19 mm (1 mm interval)

12 steel brushes, 8÷19 mm (1 mm interval) 12 brass brushes, 8÷19 mm

(1 mm interval) 1 bit holder with quick coupling and magnetic bottom

1 extension with quick coupling and magnetic bottom

= 350x255x74 mm





960KPC

🖳 009600780

Reversible impulse extractor with adjustable torque for glow plugs

• Pneumatic extractor with adjustable torque and special sockets allow jammed glow plugs to be unscrewed, thereby minimizing damage risk

5 1/4" impact sockets, long series, specially designed for glow plugs: 8-9-10-11-12 mm, 2 extensions and 1 articulated joint
4 adjustable driving torques: 10-20-30-40 Nm

Right-hand and left-hand adjustment



222,00€

30,00€



Ð

gm

3 018840010 Oil filler tool for manual and automatic gearboxes and differentials

Complete with 12 adaptors for direct connection

- Fitted with nonreturn valve for leakage-free oil filling
- Delivery: 70 cc per pump shot
 Tank capacity: 7.5 l
- Maximum permissible oil viscosity: SAE 140



1884N/C8 137,00€ 78,00€ **3** 018840200

Set of 8 adapters for item 1884

Set contents:

564,00€

329.00 €

- 1 adapter for Infiniti, 7-speed, M8x1.0
 1 adapter for Honda, Hyundai, Kia 5x8x200 mm
- 1 adapter for Skoda M18x1.5
 1 adapter for Mini M14x1.5

- 1 adapter for Nissan M10x1.5
 1 adapter for Nissan Juke M12x1.25
- 1 adapter for GM M12x1.75
- 1 adapter for VAG group vehicles, 7-gear







285,00€

Cooling system washing tool

REMARKABLE **WATER POWER**

Based on the use of compressed air, high water pressure allows for effective cleaning system washing.

Supplied with 6 system connection adapters

Operating lever with position locking for continuous use

Supplied with a water quick coupling











Cooling system seal testing and circuit filling tools

Make it possible to check circuit (pipes, joints, pumps, radiators) for

leaks under pressure and quickly fill circuit, avoiding air bubble formation.

€ 600x500x140 mm





329,00€



1477/C38

Kit with swivel ratcheting wrench, with short sockets for belt tighteners

Kit contents:

- Swivel lever with 500-mm long reversible ratchet
- Short sockets for Torx® head screws: E10-E12-E14-E16-E18
- Short hexagon sockets: 8-9-10-11-12-13-14-15-16-17-18-19-24
- Bits for Torx® head screws: T20-T25-T27-T30-T40-T45-T50-T55-T60
- Bits for cross head Phillips® screws: PH2
- Hexagon bits: 4-5-6-7-8-10 mm
- Magnetic bit holder
- 3/8" extension, 75 mm



1462/KI

4 014620235

2,930,00€ 1.429.00€

Assortment of common rail diesel injector pullers

Allows DELPHI-BOSCH-SIEMENS-DENSO injectors to be removed

- Mechanical and hydraulic operation
 Includes one 12-t hydraulic jack
 Can be directly used on vehicle with mounted engine
- · Numerous adjustment options on head make it possible to work on most engines available



530x470x140 mm







773,00€ 439.00 €

Universal vibration tool for injector removal

- Helps to fully remove jammed injectors from their housings, without damaging cylinder heads and without breaking injectors
- Can be used with any injector removal set, with or without hammer face
- Tool acts directly on removal tie rod, which is coupled with injector, through vibrations and pulses
- Control valve allows vibration intensity to be adjusted to type of work to be carried out







352,00€ 193,00€

Hammer face kit for removing injectors

Kit contents:

- 1 4 kg hammer face with 400 mm rod
- 1 articulated adapter, male M10x1.5, female M22x1.5 mm
- 1 adapter, male M22x1.5, female M13x1.4 mm
 1 adapter, male M14x1.5, female M27x1 mm
 1 adapter, male M14x1.5, male M25x1 mm

- 1 adapter, male M14x1.5, male M27x1 mm
 1 adapter, male M14x1.5, female M14x1.5 mm
- 1 adapter, male M14x1.5, male M20x1 mm
- 1 adapter, male M14x1.5, male M17x1 mm





1898/K40

3 018980004

Eco friendly, heated manual cleaning tank

- Using the bio-active liquid included, oil and residuecan be effectively removed from mechanical parts without the need for aggressive chemicals
- The bio-active liquid converts the oil and other residue into carbon dioxide and water which can bere-used again and again
- no need for specialist waste collection and disposal
- suitable for both metal and plastic parts

Equipment:

- Long bristle brush and connecting pipe
- Right-hand and left-hand operation function
- · Perforated stainless steel grid
- · Wheels with brakes
- · Card with display operating temperature and low level alert



5,350,00 € 2.639,00 €







ATTENTION:

Countries where product 1898/K40 is allowed to be distributed: Austria, Belgium, France, Hungary, Italy, Netherlands, Poland, Portugal, Spain, United Kingdom.

Accessories Included:

2 20 I cans of environmentally friendly liquid detergent and 2 packs of bacteria



Max. pump capacity	10 I/min
Tank capacity	40 I
Operating temperature	+5°C ÷ +40°C
Weight	50 kg (when empty)
Dimensions	710x370x200 mm

1895

Ultrasonic cleaning tank with special degas function

- Ultrasonic cleaning relies on fluid heating to effectively clean spare parts and metal pieces in general (carburettors, valves etc.)
- Digital display for temperature and cleaning time selection
- Two cleaning modes: "soft" and "normal"
- For normal cleaning, just use water at a temperature of 50/60 °C
- For more accurate cleaning, add non-foaming detergent solutions specific for ultrasonic tanks
- Using the degas mode speeds up air release throughout the tank, thereby improving ultrasonic cleaning efficiency





836,00 € 483,00 €

0189501

1,295,00 € 747,00 €

13 I



1.044,00 €

1895 157 7 | ••• 018950357 8,310,00 € 4.399,00 €

157 I



1895 6	1895 13	1895 <i>27</i>	1895 157
6 litres	13 litros	27 litros	157 litres

Tank capacity	6 litres	13 litres	27 litres	157 litres
Drain tap	V	V	V	✓
Power	150 Watt	300 Watt	500 Watt	2160 Watt
Heating power	300 Watt	400 Watt	500 Watt	5000 Watt
Temperature range	0÷80 °C	0÷80 °C	0÷80 °C	30÷110 °C
Cleaning time range	0-99 minutes	0-99 minutes	0-99 minutes	0-59 minutes
Frequency	40 kHz	40 kHz	40 kHz	28 kHz - 40 kHz
Power supply	220/230V	220/230V	220/230V	220/380V
Dimensions	330x180x310 mm	350x325x320 mm	530x330x380 mm	840x640x750 mm
Tank size	300x155x150 mm	325x235x145 mm	500x300x200 mm	700x500x450 mm



39,50 € **22,00** €

ULTRASONIC CLEANER

Industrial alkaline detergent for ultrasonic tank




WHEELS AND BRAKES

Multi-purpose trolley

Can be used as a mobile workstation for diagnostic tools, laptops, testers and battery chargers

- Painted sheet metal frame: unparalleled firmness and sturdiness
- Ergonomic handle
- 2 fixed rear castors Ø 160 mm
- 2 steering front castors Ø 125 mm (one with brake)





Pull-out drawer for housing a mini keyboard





Multi-purpose trolley with door, empty

4 049000112



Multi-purpose trolley, empty

i 43 kg ∠

₫ 36,5 kg



2 central shelves

and 1 fixed low shelf

made of plastic



2 useful side containers



Kit of 5 brake bleeding wrenches

kit contents:

- 5 wrenches sizes 7-8-9-10-11 mm
- 1 drain hose with check valve

OIL GOES INTO BUSH.





Pneumatic tool for pushing back and rotating right and left disc brake pistons

with accessories

 New assortment complete with all new adaptors

• Thrust: 150 kg

Automatic jack

• Operating pressure 5÷8 bar

350x310x85 mm

1471C **014710330**

42,00€

Tool for manually pushing back brake pistons, with ratchet

The tool for manually pushing back brake pistons, fitted with two swivel plates and a ratchet movement mechanism, means an effective, flexible solution for quick jobs - e.g. on commercial vehicles.



1471PT/C5

4 014710367

50.00€

Impact socket kit for brake calipers nuts

For cars of Volkswagen, Audi & Porsche group

- 3 10-tooth sockets: 11.5 mm 15 mm 20 mm
- 2 7-tooth socket: Ø 14 mm 22 mm

















186,00€

1467LF/2

2.095,00€ 1.099,00€

 (ϵ)

Electric instrument for brake fluid replacement

Allows brake fluid to be easily and quickly replaced on vehicle

- Automatically stops when tank is empty, thereby preventing air from being let in
- Maximum tank volume: 20 I
- Operating pressure: 0.4÷3.5 bar
- Power supply: 230V

Supplied with:

- Brake oil recovery tank
- 1 standard cap E20











1467

Brake fluid extractor

Pressure: min 5 bar, max 11.5 bar







3 014670080



319,00€

Set of adapter plugs for brake fluid tanks, for use with BETA items 1467LF and 1467LF/2

Set contents:


• 1 plug for Toyota vehicles

1 plug for Ford, Hyundai, Mazda, Mitsubishi, Nissan, Subaru vehicles

1 plug for Honda vehicles1 plug for Mazda

and Suzuki vehicles • 1 plug for Nissan vehicles

• 1 brake bleeding adapter plug

















· Shockproof rubber coated body

Metal operating lever

Operating pressure: 0,5÷12 bar, 7÷174 psi
• Pipe length: 58 cm

• 360° hose rotation

• 1/4" air inlet



126,50€ 54,00 €

- · Pressure release feature
- Pressure measurement feature




3 019490021 151,50€ 65,00€ Digital tyre inflator · 4 units of measurement bar/psi/kpa/kgf

Backlit LCD display • Resolution: 0.05 bar

 Self-power off after 1.5 minutes



Tyre levers









_342,00 € 197,00 €

Removal kit for damaged wheel nuts

For use on anti-theft and conventional nuts



972/C4BMW

3 00972000

Removal kit for anti-theft bolts with free rings, for BMW and Mini cars



















Automatic valve retention.

L mm	L1 mm	
78	18	











1/2"	

Ø1 mm	Ø2 mm
90	150

720RNG 22,30€ 14,00€ **3** 007200634

Impact socket for Jeep Renegade wheel nuts with aluminium damaged caps





Required when nut caps are damaged by impact wrenches.



mm 😌	L mm
16,5÷17,5	63

720MRC 23,50€ 14,00€ **3** 007200631

Impact socket with polymeric insert for Mercedes wheel screw



Suitable for the following Mercedes models:
- Classe C e GLK (W204)
- Classe E (W211, W212, W207)

- Classe SLK (W172)
- Classe ML (W164, W166) Classe CL (W216) Classe S (W221, W222)





⊕ mm	L mm
17	85

14,00€

Impact socket for Ford wheel nuts with aluminium damaged caps

Required when nut caps are damaged by impact wrenches





22,30€







⊕ mm	L mm
18,5÷19,5	63

17,00€

Wheel nut plastic cap pliers


Lenght: 195 mm









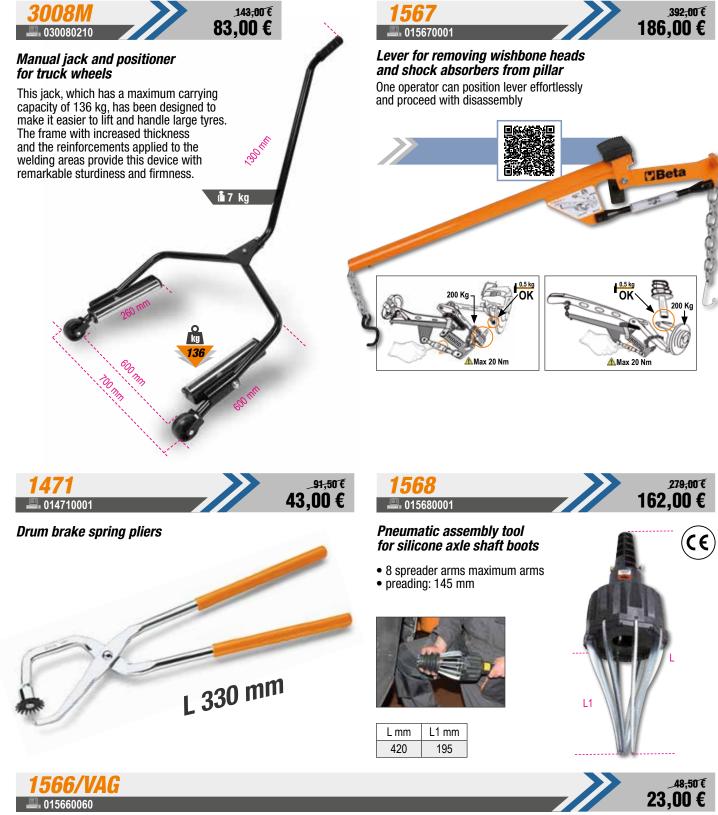

Kit of XZN® impact sockets for axle shaft screws of VAG Group vehicles

Sizes included in kit:

- XZN® male impact socket M12 L 77 mm
- XZN® male impact socket M12 L 120 mm

This kit of impact sockets with XZN® M12 profile, available in two different lengths, has been specially designed to make it easier to remove the three screws from the axle shaft - gearbox side - in VAG Group vehicles. This allows the axle shaft to be pulled out, without requiring the accessory parts to be removed.







146,00€ 83.00€

Kit for spreading shock absorber, wishbone and steering wheel joints apart

Working with single or double retractor head also makes it possible to work on double joints, e.g. from VAG group.



142,00€

Compressor for shock absorber springs

min L Max 65÷320 mm



1550U

4 015500010

3.480,00€ 1.869.00€

Pneumatic shock absorber removal tool for cars, SUVs and commercial vehicles

- . Upper universal hold system that allows all left/right-hand spring diameters to be compressed with one upper adaptable plate
- · Active safety system on spring: safety hook and 3 locking valves allow spring to be properly positioned/seated, maintaining such position throughout compression If spring is not positioned properly, system will stop machine.
- · Protective "Full Body" Grille










- Supplied with 2 lower forks for diameters 78-205 mm
- Maximum thrust: 2 tons (10 bars) - 1.6 tons (8 bars) - 1.2 tons (6 bars)
- Spring compression stroke: 335 mm

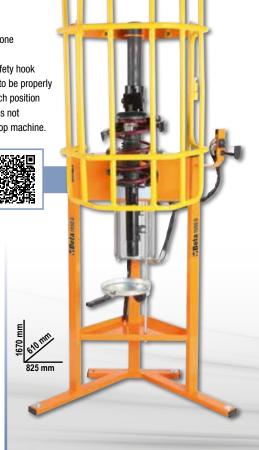

289,00€ 156.00 €

Assortment of tools for removing and installing rear axle silent blocks, driving shaft oil seals and wheel bearings

• Bushings can be used both on vehicle and on hydraulic press

₩ 425x365x100 mm




MAXIMUM THRUST 2 TONS (10 BAR)

1068 **3** 010680000

140,50€ \$0,00€

Adjustable self-locking pliers with hammer face

The self-locking pliers with 1 kg sliding hammer face is ideal for pulling stud bolts, broken screws and sheets, especially in the car repair industry.









3 013640001

470,00€ 268,00€

Extension bodywork support

- 4 swivel castors, 2 with brakes
 Pantograph can be extended up to 1400 mm
 Vertically adjustable up to 1315 mm
- Position locking
- Contact surface covered with removable rubber











L mm	H mm	P mm	
215÷1400	780÷1315	890	

267,00€ **153,00**€

Bodywork support with central tray

- Contact surface covered in polyethylene
 Tray dimensions: 340x845x40 mm
 Foldable









428,00€

1364SCP

Revolving bodywork support

- Particularly suitable for bonnets, wings and doors

 • Fitted with 4 castors - 2 steering with brakes

 • Can be rotated up to 180°










L mm	H mm	Pmm	
1100	1300	680	



Adjustable self-locking pliers, concave jaws

	L mm	ø Max mm	å g	=======================================	€
1052/140	140	22	175	010520014	_31,00€ 18,00€
1052/190	190	36	360	010520019	34,50€ 20,00€
1052/240	240	42	590	010520024	_37,50 € 22,00 €
1052/300	300	55	900	010520030	_62,00€ 36,00€

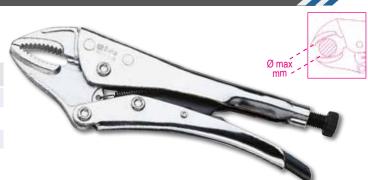

1768

3 017680010

221,50 € 129,00 €

Aluminium footboard





L mm	L1 mm	H mm
960	300	475

142,00€

76,00€



30090001

497,00€ 286,00€

Wheel lifter

Maximum lifting capacity: 550 kg

- 4 pivoting rollersRoller width: 200 mm
- For wheels up to 240 mm in width


IDEAL FOR:

- LOADING DAMAGED CARS **ONTO TOW TRUCKS**
- CAR REPAIR GARAGES
- MOVING CARS IN SHOWROOMS





Double suction lifter












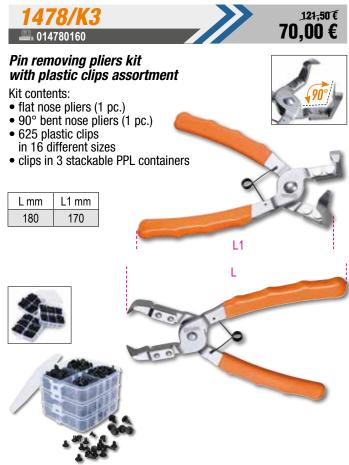

Oil pressure pump, 10 t, and bodywork accessories kit in handy trolley

Kit contents:

- Oil pressure pump, 10 t, with 1.5-m-long hose, 1/2" coupling
- Piston
- Wing opening pliers; capacity: 500 kg
 Baseplate, 150x90 mm
 L-shaped base, 50x50 mm

1365/K13

3 013650013

- 4-point punch
- Round, knurled punch, Ø 50 mm
- · Wedge-shaped punch, 43 mm
- 170-mm-long extension300-mm-long extension
- 400-mm-long extension530-mm-long extension
- · Rubber head
- Male-to-male coupling for installing accessories




1361/K9 **3** 013610030

355,00€ 202,00€

Kit of 8 levers for bodywork dent pullers

- Kit contents:
 Round ball head rod, Ø 31 mm, length 110 cm

- Round ball nead rod, Ø 31 mm, length 110 cm
 Tip rod, length 62 cm
 Whale tail tip rod, length 112 cm
 Hook tip rod, length 27 cm
 Flat round head rod, length 50 cm
 Round ball head rod, Ø 19 mm, length 52 cm
 Whale tail head rod, length 27 cm
 Pound whale tail head rod length 28 cm
- Round whale tail head rod, length, 28 cm
- · Fabric bag with handles

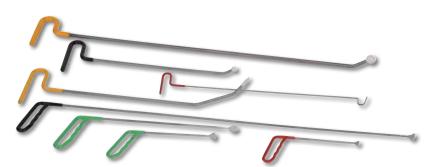



1368

= 013680001

Plastic repair kit

 Power supply: 220÷240 V with Schuko socket

- . Heat gun cable length: 3.5 m
- Power supply cable length: 1.35 m
- 2 power adjustments: 35-75 W
 Heat gun with brass terminals, 2 staple insertion angles: 0°-90°
- Input protection: thermal circuit breaker
- Output protection: 10 A fuse
- Metal gun pocket



3 013660400

Multifunction bodywork spotter

· Microprocessor for managing welding parameters

Contact and manual welding cycle start

Automatic spot welding time setting

 Supplied with quick coupling gun and 2.2-m-long ground cable


Accessory kit contents:

- extractor hammer
- three-pointed washer head
- 10 three-pointed washers
- carbon electrode
- · squashing electrode



2,330,00€ 1.299,00€









34,00 € **20,00** €

Reusable seat, steering wheel and gear knob protector



_{*} 022540150

99,50€ 54,00€

Car front protector

Allows front part of vehicle to be protected, while leaving openings for headlights and radiator



1479/B27 **=** 014790407

50,00€

Kit of 27 nylon tools for removing pins and working on plastics and seals, hangable







549,00€

1870I

= 018700220

Solid and fluid vacuum cleaner, 20 l, stainless steel drum

· Single-stage by-pass motor

 Voltage: 220/240 V • Frequency: 50/60 Hz • Max. power: 1200 W • Airflow rate: 58 l/sec.

• Max. suction pressure: 190 mbar

• Max. drum capacity: 20 I, made of stainless steel

Acoustic emissions: <70 dB(A)

• Cable length: 5 m

Standard accessories Ø 36 mm

- 1 corrugated hose with ergonomic handle and vent
- 2 hard extension tubes
- 1 multiuse brush for floors and fluids
- 1 flat nozzle
- 1 paper bag



Filtering systems

• 1 surface air filter cartridge 1900 cm² - 12 µm nom.

• 1 anti-foam filter PPI 45/PPI 30





662,00€ 390,00€

Injection/extraction carpet/upholstery cleaner

Ideal for deeply cleaning textile surfaces.

It dispenses pressure sprayed detergent and sucks it up with dirt, leaving surfaces almost dry.









Technical data:

- Voltage: 230/240 V
- Frequency: 50/60 Hz
- Max. power: 1100 W
- Airflow rate: 58 l/sec. . Max. drum capacity: 20 I
- Max. detergent tank capacity: 3 I
- Max. pump pressure: 7 bar Max. suction pressure: 21 kPa
- Pump power: 48 W

Supplied accessories:

- 1 hose complete with ergonomic handle
- 1 dispenser unit
- · 2 hard extensions
- 1 small spray extraction nozzle
- 1 big spray extraction nozzle
- 6 power cord locknuts

1874 50 018740050

Solid and fluid vacuum cleaner, 50 l, stainless steel drum

• Two-stage by-pass motor

 Voltage: 220/240 V • Frequency: 50/60 Hz

• Max. power: 1350 W • Airflow rate: 55 l/sec.

• Max. suction power: 240 mbar

• Max. drum capacity: 50 I, made of stainless steel

Acoustic emissions: <63 dB(A)

• Cable length: 6 m Trolley for accessories

FILTERING SYSTEMS

• 1 filter paper bag

• 1 surface filter cartridge 5200 cm², 12 µm nom.

1 anti-foam filter PPI 45/PPI 30

STANDARD ACCESSORIES, Ø 45 mm

- 1 corrugated hose with ergonomic handle
- 2 stainless steel extension tubes
- 1 industrial brush frame
- 1 industrial section for carpets 1 industrial section
- with fluid collection hoses
- 1 flat nozzle







1898/C 286,00€ **175,00 €**

Wheeled sprayer, 25 I

• Dual function: spraying and foaming

· Painted steel tank

· Stainless steel nozzle

· Anti-twisting hose

• Tank pressure gauge

Tank level indicator

Technical data:

• Tank capacity: 25

• Supply hose length: 5 m

• Maximum working pressure: 4-5 bar

• Nozzle length: 0.65 m

• Maximum tank pressure: 8 bar



1*8<u>9</u>8/*M

3 018980930

Pressure sprayer with 1,5 I tank

- Adjustable nozzle with straight jet and mist spray
- Graduated scale 0.5 I 1 I 1.5 I
- Locking lever for continuous jet
- Not for use with hydrocarbons









3 018980932

31,00€ 19,00€

Hand pressure pump with 5 I tank

- Stainless steel nozzle
- Locking lever for continuous jet
 Adjustable nozzle with straight jet and mist spray
- Shoulder strap for ease of transport
 Nozzle hook-up handle
- 1.2-m-long hose
- Not for use with hydrocarbons



170,50€ 98,00€

Adjustable swivel creeper seat with tool drawers

- Vertically adjustable seat $(445 \div 580 \text{ mm})$
- Square tool chest (380 mm) with 2 drawers (2+1)
- Drawer dimensions: 350x180x90 mm
- Tote-tray dimensions: 2X 190x190mm -1X 380x190mm
- 4 pivoting castors, Ø 75 mm
- Weight: 11 Kg



30030**30030100**

282,00€ 153.00€

Creeper made of shockproof plastic

Complete with:

- Head and lumbar region with carbon look finish
- Upper metal plates for fixing magnetic accessories



30020001

Creeper and seat

- · Steel frame
- · PVC lining with upholstery
- · Easily convertible into a creeper or a seat
- Weight: 6,5 Kg



133,50€

77.00€













3023 030230050

248,50 € 146,00 €

Pit and under bridge jack with screw adjustment

MAXIMUM CARRYING CAPACITY: 350 KG

H min-Max mm	Ø mm
1350÷2030	300





3011T

Hydraulic bottle jack





	C max kg	H min÷max mm	(ET)	€
3011T 2	2000	174÷369	030110020	194,50€ 55,50€
3011T 3,5	3000	170÷366	030110035	117,00€ 61,00€
3011T 5	6000	203÷467	030110050	131,50 € 72,00 €
3011T 10	10000	220÷484	030110100	197,00€ 105,00€
3011T 15	15000	230÷497	030110150	241,00€ 132,00€
3011T 20	20000	245÷521	030110200	393,00 € 175,00 €
3011T 32	32000	260÷420	030110320	314,00€ 186,00€
3011T 50	50000	280÷450	030110500	363,00€ 219,00€

3010T

Jack stands, pair

€		=== ==================================	H min÷max mm	C max kg		
65,00€	117,00€	030100002	280÷425	2000	3010T 2	
76,00€	139,00€	030100003	285÷430	3000	3010T 3	
109,00€	202,00€	030100006	400÷580	6000	3010T 6	
189,00€	348,00€	030100010	471÷735	10000	3010T 10	



3010T 2 3010T 3 3010T 6



3010H

Heavy-duty jack

	C max kg	H min÷max mm	L / L1 mm	å	[=:]	€
3010H631-T15	15,000	445÷631	300x300	22,5	030100150	376,00€ 215,00€
3010H1077-T15	15,000	645÷1077	300x300	30	030100165	472,88€ 265,00 €



3010V

Heavy-duty jack stands, screw adjustable

	C max kg	H min÷max mm	L / L1 mm		€
3010V600-T20	20,000	410÷600	330x330	030100200	548,00 € 305,00 €
3010V1090-T20	20,000	665÷1090	460x460	030100220	696,00 € 395,00 €









154,00€ 88.00€

1.022,00€

Kit of pin punches and plate for presses 3028

Sizes of pin punches:

30280055

- Ø10X90mm
- Ø12X90mm
- Ø16X90mm
- Ø18X115mm
- Ø20X115mm
- Ø22X115mm • Ø25X140mm
- Ø30X140mm



3027PR/N

030270410

Press supporting tool for removal/insertion of hubs, bearings and silent blocks

Universal device allowing user to install/remove hubs, bearings and silent blocks into/from their housings by operating via a press, through a supporting base and dedicated accessories. Designed to adapt to irregular geometric shapes of hubs/king pins on which operator must work.Can be used with presses 3027N and 3028.

.418.00€

Technical data:

- Working range: min. 135 mm max. 150 mm
- . Maximum load bearing capacity: 20 t



2.497.00€







3026 0,5

500 kg

| 1140 ÷ 1990 mm | 1140 ÷ 1990 mm

3026 1,0

1000 kg

3026 0,3

300 kg

1120 ÷ 1970 mm

1.650,00€ 945.00€ **30140360**

Folding engine stand

· Easy to fold up, for significantly increased compactness

Allows 360° rotation of engine or gear

 Provides unparalleled safety and stability during jobs





CAPACITY: 450 KG



799,00€ 384.00 €

Universal transmission support

· Allows one operator to disassemble and reassemble any transmissions of cars, commercial vehicles and off-roaders quickly and safely Suitable for stands with diameter: 25-30-35-45 mm

Max. capacity: 150 kg







1889N

Load limiting valve


Maximum capacity Pedal pump Minimum height

🖳 01<u>8890220</u>

938,00€ 384.00 €

Steel handling and storage base for 2 200-l barrels

- · Easy to carry with a fork lift truck or a pallet jack
- Support cannot be placed under any part
- Completely hot painted with epoxy powder, for high resistance to chemicals










Robur



Lifting web slings, green 2t two layers with reinforced eyes high-tenacity polyester (PES) belt EN 1492-1



 Lifting web slings 	
 Two layers with reinforced eyes 	3
 High-tenacity polyester (PES) be 	ŀ



	L		position to		C
8153 1-T2	1	60	081530010	10,40€	6,50€
8153 2-T2	2	60	081530020	16,10€	9,50€
8153 3-T2	3	60	081530030	21,90€	13,00 €
8153 4-T2	4	60	081530040	27,00€	17,00€

8156

Lifting web slings, yellow 3t two layers with reinforced eyes high-tenacity polyester (PES) belt EN 1492-1

		- 1
		-
	8156 2-T3	
	8156 3- T 3	
	8156 4-T3	
	8156 6-T3	
H	_	

	LIII	11111111	process 5	•
8156 2-T3	2	90	081560020	24,18€ 15,00€
8156 3-T3	3	90	081560030	33,50 € 20,00 €
8156 4-T3	4	90	081560040	41,50€ 25,00€
8156 6-T3	6	90	081560060	58,50€ 35.00€



82,50 € 44,00 €

Bag with set of 4 ratchet tie-downs 8181, 6 m high-tenacity polyester belt, single hooks
The had includes 4 ratchet tie-downs with single hook

The bag includes 4 ratchet tie-downs with single hooks, high-tenacity polyester belt (PES), 35 mm, 6 m long.



72,50€ **38,00**€

Bag with set of 2 ratchet tie-downs 8182, 8.5 m high-tenacity polyester belt, single hooks

The bag includes 2 ratchet-downs with single hooks, high-tenacity polyester belt (PES), 50 mm, 8.5 m long.



MOTORBIKE REPAIR





Ral 2011 Ral 7016 Ral 3000 030500201 | 030500202 | 030500203





Quantity/Description

- Evox screwdrivers for slotted head screws 3,5x100-5,5x150-6,5x150 mm
- Evox screwdrivers for cross head Phillips® screws 4,5x80 6x100 mm
- Multipurpose tool complete with bits and sheath
- LED inspection torch 133 mm
- Instant glue for structural joints 5 gr PVC electrical tape sp.0,15 mm / 19 mm x 25 m
- 50 Nylon cable ties 4,8x300 mm
- Roll-up tool wallet made of durable polyester, empty

30430002

114,50€ 65,00€

Motorcycle stand with left single arm

- Matt black lacquer
- 4 thermoplastic rubber wheels
- Optional pin

Beta N.

55 96BPC/SC9

1201E

1202E

9851 BMESB1925NE

1778MT

1833 XS/2

BMN3048

2002/BV42







4,150,00€ 2.199.00 € **39100010**

E-Bike lift

- Maximum height of central movement support: 135 cm
- · Built-in wheel truing stand
- Innovative thru-axle locking system
- · Supplied with adapter sockets for most forks
- Supplied with fork connection adapter without thru-axle
- Fully foldable and transportable





PRO workshop workbench for bicycle maintenance

- · With support for central movement, with safety pin
- Built-in wheel truing stand
- Innovative thru-axle locking system





458.00€ 263,00€

Professional wheel truing stand

- Can be fixed onto both a workbench, with supplied clamps, and into a vice
- For ø 20" ÷ 29"
- Through axle hub adapter, 10 ÷ 20 mm
- · Can be used with hub spacings ranging from 85 mm to 195 mm



605BC/15

H min-Max mm 1230÷1380

Click-type torque wrench with reversible ratchet, for right-hand tightening, compact, made from aluminium, torque accuracy: ± 4%



- Accuracy: ± 4%, right-hand
- Reversible ratchet, 72 teeth
- Right-hand tightening
- 1/4" square drive
- Unit of measurement: Nm
- Compact: no more than 17.5 cm









The smallest torque wrench of Beta's range: compact and easy to use, it provides an ideal combination of convenience and simplicity within reach.

600 mm

Nm	kgfm	lbf.fn		L (mm)	шш
3÷15	0,3÷1,5	26÷133	1/4"	175	0,1





NEW

THAT DOES NOT REQUIRE LUBRICATION

The impact wrench, 19270LS, fully designed, developed and engineered by Beta Utensili, relies on the **OIL-LESS system**, a brand-new innovation in the pneumatic tool industry: it allows the impact wrench to operate without having to be periodically lubricated with oil, thus ensuring increased durability and high performance.

The painstakingly studied assembly, micrometer alignment of the interior parts and use of innovative first-rate materials result in a reduced number of failures, for lubrication-free lifetime use.



Balanced and powerful, with unparalleled service



PATENT PENDING

The OIL-LESS impact wrench stands out for high torque transmission – that is, 1750 Nm –, which makes it ideal for any application.







- No lubrication required
- Double hammer impulse device

Free speed	8.000 rpm
Max. torque	1.750 Nm
Bolt capacity	CI 8.8 M24 36 mm
Bolt capacity	CI 12.9 M20 → 30 mm
Air inlet	1/4" GAS
Operating pressure	6,2 bar
Internal hose size (Ø)	10 mm
Mean air consumption	198 I/min

Three power adjustable screwing positions

å 2,5 kg Vibration free handle







Exhaust through handle

4 TIMES THE USEFUL LIFE OF A TRADITIONAL IMPACT WRENCH

Based on these hallmarks, the OIL-LESS impact wrench can boast an excellent cost/benefit ratio, thus translating into savings in the long run.



3 019270008

495,00€ 219,00€

3 019270118

647,00€



241,00 €

Reversible impact wrench, supplied with 3 impact sockets, in plastic case



Reversible impact wrench

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- · Reversible lever
- Three power adjustable screwing positions
 • Exhaust through handle
- Vibration-damping handle

1750 Nm

Free speed	rpm	7.500
Impulse device		Double hammer
Max. torque	Nm	1750
Bolt capacity	CI 8.8	M24●36 mm
Bolt capacity	CI 12.9	M20●30 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	290



🖳 019270030

308,00€ 164,00€





380,00€ 197,00€



Compact reversible impact wrench

- Single hammer impulse deviceAmazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle
- Balancing hook



Free speed	rpm	10.000
Impulse device		Single hammer
Max. torque	Nm	770
Bolt capacity	Cl 8.8	M22●34 mm
Bolt capacity	CI 12.9	M18 ● 27 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	I/min	122
•		



Assortment of 1 compact reversible impact wrench and 5 impact sockets,







Reversible impact wrench, made from composite material





- Double hammer impulse deviceReverse control knob
- · Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle



1927C



259,00€ 42,00 €

- Reversible impact wrench, made from composite material
- Double hammer impulse device
 Lightweight and well-balanced, for enhanced ease of use
- Reverse control lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle



658,00€ 373,00€

Compact reversible impact wrench

- Double hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle

1600 Nm

Free speed	rpm	4.800
Impulse device		Double hammer
Max. torque	Nm	1600
Bolt capacity	CI 8.8	M27●41 mm
Bolt capacity	CI 12.9	M24●36 mm
Air inlet	GAS	3/8"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	I/min	175






1928DA

3 019280022

952,00 € 439,00 €

Reversible impact wrench

- Double hammer impulse device
- Sturdy and compact; high torque
- Reversible lever
- Three power adjustable positions
- Exhaust through handle
- Slip-proof ergonomic handle





3/8

62

10

1,310,00 € 604,00 €

Reversible impact wrench, made from composite material

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- · Reversible lever
- . Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle





1930LH

3 019300030

Operating pressure

Internal hose size (Ø)

Mean air consumption

Air inlet

1,470,00 € **824,00** €

GAS

bar

mm

I/min

6.2

13 350

Air inlet
Operating pressure

Internal hose size (Ø)

Mean air consumption

Reversible impact wrench

· Double hammer impulse device

GAS

har

mm

I/min

- 210 mm (8.3") long anvil
- New 70-degree angled handle design to relieve stress and fatigue on the operator's wrists
- Auxiliary side handle
- 3 power adjustable screwing/unscrewing positions
- Lower exhaust
- Excellent weight/power ratio







720ME/C8

007200525

_170,00€ 98,00€

8 impact socket drivers for hexagon screws

O 5-6-8-10-12-14-17-19 mm







== 270x120x45 mm

139,00 € 81,00 €

464,00€ 230.00€

6 impact socket drivers for Torx® head screws

12"

Set of 24 impact sockets, 1/2" female drive, phosphatized, in metal case









217,50€ 120,00€

4 007280910

390,00€ 219,00€

12 impact sockets

12"

10 impact sockets

3/4"(

O 10-11-12-13-14-17-19-22-24-27-30-32 mm

≡195x80x55 mm



○ 17-19-22-24-27-30 -32-36-41-46 mm



₹ 275x120x65 mm




HIGH TOROUE WITHOUT AFFECTING WRIST

Reversible air impact ratchets

- · Double rocking dog" impulse device
- Easy tightening: The impact mechanism system eliminates wrist twisting at end of screwing and shortens operating time
- Compact and powerful: maximum torque is significantly higher than maximum torque as achieved with a conventional ratchet
- · Ergonomic rubber handle







88



528,00 €

1922P3 •• 019220013	-		27	_481,00€ 4,00 €
136 Ni	<u>n_</u>			1/2"
			⊠Beta	
i 1,5 Kg		292 mm		
Free speed	rom	600		

Free speed	rpm	600
Maximum torque	Nm	136
Bolt capacity	CI 8.8	M12●18 mm
Bolt capacity	Cl 12.9	M10€16 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	113
•		



4. 019370001


Roto-orbital palm sander, lubrication free, made from composite material

- No lubrication required
- · Extremely compact and easy to handle
- Orbit diameter: 5 mm
- · 6-hole Velcro pad


Mean air consumption

1937

- Continuous motor speed adjustment
- · Nonslip, soft material handle
- Designed for connection to suction systems with swivel fittings
- Revolving exhaust







Orbit Ø 5 mm

372,00€ 211,00€ **3** 019420000


Air saw

· Powerful and handy

 Designed for cutting bodies, exhaust pipes and silencers, aluminium and plastic

 Complete with rubber handle, PVC exhaust pipe and air-feeding hose

Rear exhaust





1952

183,50€ 105.00€

Professional paint spray gun

- · Die-cast aluminium body plated with black chemical nickel
- Nylon cup with drip-catching device, 3/8M BSP thread
 Body thread: 1/4" BSP cylindrical gas thread
 Pressure and airflow regulator

- Jet regulator from round to fan spray pattern
- Paint quantity regulator
- Supplied with service spanner for maintenance operations

	Ø mm	EI
1952 1,2	1,2	019520012
1952 1,5	1,5	019520015
1952 1,8	1,8	019520018
1952 2,0	2,0	019520020



Beta

SAFETY FOOTWEAR AND WORKWEAR



E	U	35	36	37	38	39	40	41	42	43	44	45	46	47	47
U	K	2.5	3.5	4.5	5	6	6.5	7	8	9	10	10.5	11	12	13










HE NEW SAFETY FOOTWEAR RANGE

Renegade has been designed to provide uncompromising safety and style.

The range, which comprises 6 models in unique colours and materials, perfectly suits those interested in standing out in any working environment. Renegade relies on a design inspired by latest generation sports shoes, superior cushioning and remarkable support to provide comfort all day long.

BASED ON A BOLD, **UNCONVENTIONAL** STYLE.

Renegade is an ideal pick

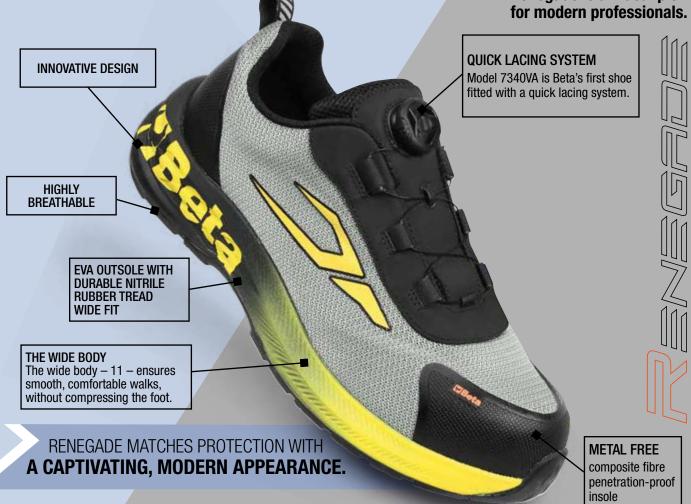













7340VA



RENEGADE mesh fabric shoe, highly breathable, with ATOP lacing

S1PS FO SR HRO

Sizes available: from 37 to 48 In from 073400**537** to 073400**548**



Renegade







CE

NEW

7340G



RENEGADE mesh fabric shoe, highly breathable, with traditional lacing



S1PS FO SR HRO

Sizes available: from 37 to 48 ___ from 073400637 to 073400648

7341Y



RENEGADE woven fabric shoe, hard-wearing and breathable, yellow details



S1PS FO SR HRO

Sizes available: from 37 to 48 From 073410637 to 073410648 7341V



RENEGADE woven fabric, hard-wearing and breathable, green details



S1PS FO SR HRO

7342N



RENEGADE microfibre shoe, water-repellent



S3S FO SR HRO

7343N

RENEGADE microfibre ankle shoe, water-repellent



S3S FO SR HRO

186,00€




Fit**Evolution**

Seven uniquely designed models, available in several colours and materials, ranging from mesh to microfibre, to satisfy the most demanding users' requirements.

THE PATENTED SYSTEM BETA IT4YOU

TO CUSTOMIZE COMFORT IN THEIR SAFETY FOOTWEAR.

After several years of painstaking studying and designing, we developed the patented system, **FIT 4 YOU**. This state-of-the-art penetration-proof insole pressing process allows three different **ETPU** inserts – each with different densities – to be combined, to provide three levels of comfort, thus satisfying every user's requirements.



ETPU Inserts

ETPU is the core of the FIT 4 YOU system, ensuring a cushioning effect and energy return. Based on three provided inserts varying in density and colour, it allows both softness and support to be customized in the shoe, according to weight, height and personal requirements.

This groundbreaking technology ensures optimal comfort while moving as well as during static breaks, thereby resulting in reduced joint stress and fatigue.



The patented system, **FIT 4 YOU**, is based on **3 provided ETPU** inserts, varying in density and colour, to allow the user to customize the shoe according to weight, height and personal usage requirements.



Composite fibre penetration-proof insole
3 ETPU inserts, with 3 different densities,

for a customized shoe

• Heel stability support and traditional lacing.

• Dual-density polyurethane outsole

Composite toe cap



FitEvolution woven fabric shoe, hard-wearing and highly breathable

S1 PS FO SR ESD



Sizes available: from 37 to 48 from 072720137 to 072720148



7270Y 163;00 € 92,00 €

FitEvolution mesh fabric shoe, highly breathable



S1 PS FO SR ESD



Sizes available: from 37 to 48 if from 072700137 to 072700148

7273G

167,00 € **95,00** €

FitEvolution nubuck shoe, water-repellent



S3 S FO SR ESD



Sizes available: from 37 to 48 ignormalists from 072730137 to 072730148 7271V

163,00 € **92,00** €

FitEvolution suede shoe, perforated



S1 PS FO SR ESD



Sizes available: from 37 to 48 from 072710137 to 072710148

7274G

172,50 € **98,00** €

FitEvolution nubuck ankle shoe, water-repellent



S3 S FO SR ESD



Sizes available: from **37 to 48**From 072740**237** to 072740**248**

7275N

167,00€ **95,00**€

FitEvolution microfibre shoe, water-repellent





Sizes available: from 37 to 48 III from 072750**237** to 072750**248**



EXTREMELY LIGHT







LESS THAN 500 G

APPROXIMATE WEIGHT FOR SIZE 42

7352B

145,00€ 82.00€

0-Gravity mesh fabric shoe, highly breathable, with TPU inserts



S1P HRO SRC ESSENTIAL



Sizes available: from 38 to 48 from 073520**138** to 073520**148** 7352G

150.00€ 85.00€

0-Gravity ultralightweight mesh fabric shoe, highly breathable

• Composite toe cap

Traditional lacing

• Wide fit







Sizes available: from 38 to 48 from 073520**338** to 073520**348**

ACTIVE







7317NA

83,00€ 48.00€

Suede shoe, perforated, with microfibre reinforcement in heel area



S1P SRC

Sizes available: from 35 to 48 In from 073170**135** to 073170**148** 7320NA

87,50€ 49.00 €

Nubuck shoe, water-repellent, with anti-abrasion reinforcement in toe cap area



Sizes available: from 35 to 48 from 073200**535** to 073200**548**

FLEX

THE MOST FLEXIBLE









81,50€ 43.00€

Suede shoe, perforated, with mesh inserts.



Sizes available: from 35 to 48 from 072120**235** to 072120**248** 7214G

88,00€ 47.00 €









NEW LOOK!



Curved visor Cap. 100% polyester, strap closure black





53,50 € 29,80 €

Sweatshirt

• Short-zipped, 80% cotton, 20% polyester, 280 g/m², a anthracite/light grey




hinhalahalal	XS	S	M	L	XL	2XL	3XL
	076430 000	076430 001	076430 002	076430 003	076430 004	076430 005	076430 006

7820SG








- 39% cotton, 61% polyester
- Mechanical stretch ripstop fabric, 170 g/m²
- · Pad pockets and stretch waistband on sides
- Regular fit









7821SG





- · Multipocket style, 39% cotton, 61% polyester,
- Mechanical stretch ripstop fabric, 170 g/m2,
- · Stretch waistband on sides
- Regular fit





















42.00 €

Stretch work Bermuda shorts, lightweight, multipocket style

• 86% nylon - 14% spandex, 140 g/m², anthracite grey





















Technical work t-shirt, made from polyester, 120 g/m², with 37.5® technology,

· Grey with black, orange and reflex details

	Lidadalad	XS	S	M	L	XL	2XL	3XL
7550G		075500 400	075500 401	075500 402	075500 403	075500 404	075500 405	075500 406
7550N		075500 500	075500 501	075500 502	075500 503	075500 504	075500 505	075500 506



075480**500** 075480**501** 075480**502** 075480**503** 075480**504** 075480**505** 075480**506**

PATENTED 37.5® HYPOALLERGENIC, SKIN-FRIENDLY TECHNOLOGY.




58,50€ 32,00€

Work trousers in T/C twill, 180 g/m², ■Beta ==== (IGH)

- T/C twill, 65% polyester, 35% cotton; 180 g/m2
- T/C ripstop insets and knee pads
- Strap "Oxford" snap loop









Work overalls, lightweight

- 65% polyester, 35% cotton
- Oxford inserts















Capsule espresso coffee machine







- 095630050

286,00€ 143,00€

Office armchairs, for guests

- · Back height: 60 cm
- Seat dimensions: 45 cm x 51 cm
- Overall chair height: 110-120 cm
- Base: 28 cm (leg length) x 50-60 cm (height)





9599CB-N2 **-** 095990031

748,00€ 428.00€



- Hi-Ten Tig TKK 700c frame
- Shimano® Tourney RD-TZ50 derailleur, 6-speed
 V-Brakes®
- 28" aluminium rims, double tube
- Battery lightsMetal mudguard and chain guard
- Supplied with: pannier rack, stand and bell
- Colour: matt black

9566K

3.095660500

Furnishing set, table and three stools. vertically adjustable



428,00€

167,00€

Work overalls, racing style, made from 4 way stretch fabric

STYLE

The accurate details as well as the colours and inspiration from the racing world result in a captivating, trendy garment.

CONVENIENCE

The 4-WAY STRETCH fabric provides unique comfort for every movement.



Linkinkink	S	M	L	XL	2XL	3XL
	095770 151	095770 152	095770 153	095770 154	095770 155	095770 156

43,50 € 21,00 € *9574B*

Work gloves





BETA POLSKA Sp. z o.o.

Skarbimierzyce, ul. Wiosenna 12, 72-002 Dołuje tel. 91 48 08 227, 91 48 08 236 fax: 91 48 08 219 bok@beta-polska.pl www.beta-polska.pl